MIKALOR




One ear clip W1
with Stainless steel inner-ring


The fact that these clamps are used on very small-bore hoses means that the material of the tube or hose can sometimes be very flexible, making it more difficult to ensure a leaktight assembly due to the possible deformation of the hose.

In these cases, the inner-ring is key in helping to guarantee leaktightness as well as protecting the hose from being pinched during assembly.

Ø Application mm	Part Number	A ±0.2	B ±0.2	C ±0.2	D +0.3 -0.2	F ±0.2	G ±0.2	E +0.1 -0.02	Máx. Pressure (Bar)	Box Quantity	Outer Box Quantity
7,5-8,5	03011009	9,3	5,5	6,0	13,0	8,8	7,8	0,8	27	1.000	8.000
8,0-9,5	03011010	10,3	6,0	6,0	14,0	9,8	7,8	0,8	27	1.000	8.000
9,0-10,5	03011029	11,3	6,5	6,5	15,0	10,8	7,8	0,8	27	1.000	8.000
10,0-11,5	03011037	12,3	7,0	6,5	16,0	11,8	7,8	0,8	27	500	8.000
10,5-12,5	03011045	13,3	7,5	6,5	17,0	12,8	7,8	0,9	27	500	8.000
11,5-13,3	03011053	14,3	8,0	7,0	18,5	13,8	8,8	1,0	22	500	2.000
13,0-15,3	03011061	16,3	8,5	7,0	20,5	15,8	8,8	1,1	22	500	4.000
15,0-17,3	03011070	18,5	9,5	7,0	23,0	18,0	8,8	1,1	18	500	2.000
16,0-18,3	03011082	19,5	10,0	7,0	24,5	19,0	8,8	1,1	18	250	2.000
17,0-19,3	03011093	20,5	10,0	7,5	25,0	20,0	9,8	1,1	18	250	1.000



TECHNICAL INFORMATION	
MATERIAL	W1 Steel DC04 (EN 10139) Stainless steel inner-ring AISI 301
CORROSION RESISTANCE	72 hours salt spray (ASTM B-117)

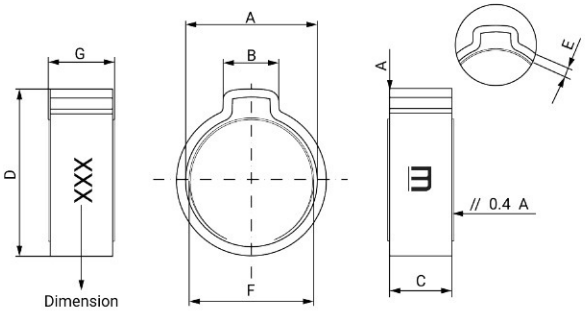

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy