
MIKALOR

W3 ASFA-L (9 mm) Constant Tension Hose Clamp with Pre-Assembly Clip



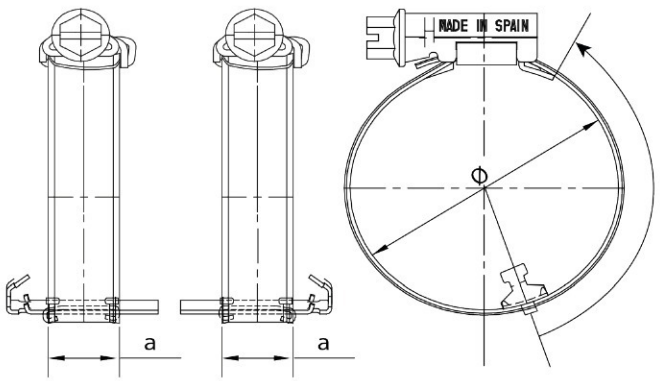

With the aim of saving time and increasing productivity on the assembly line, Mikalor has developed the only clamp of its kind capable of guaranteeing the same tightening torque values and the same performance as a standard clamp.

Thanks to its exclusive design, the pre-assembly clip can be fitted to the clamp and later attached to the hose without any loss of functionality, tightening torque or reduction in performance. Another new feature of our pre- positioning system is that the clip can also be fixed to the hose using adhesive. This is the only pre-assembly system which guarantees that the hose is not damaged when the clamp is tightened.

MATERIAL:	W3 - Steel AISI 430
FINISH:	Stainless steel
CORROSION RESISTANCE:	200 hours salt spray (ASTM B-117)

* Special dimensions and positioning of the clip according to customer requirements are available on request.

* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

a	Ø Application mm	Part Number		Par (Bar)	Box Quantity
		Right	Left		
9	16-27	03055001	03056001	40	50
9	20-32	03055002	03056002	36	50
9	25-40	03055003	03056003	32	50
9	30-45	03055004	03056004	28	50
9	32-50	03055005	03056005	24	50
9	40-60	03055006	03056006	19	25
9	45-65	03055007	03056007	17	25
9	50-70	03055008	03056008	17	25
9	55-75	03055009	03056009	17	25
9	60-80	03055010	03056010	15	25
9	65-85	03055011	03056011	13	25
9	70-90	03055012	03056012	13	25
9	75-95	03055013	03056013	11	25
9	80-100	03055014	03056014	11	25