
MIKALOR

W4 ASFA-L (9 mm) Hose Clamp with Anti-Rotation Hole



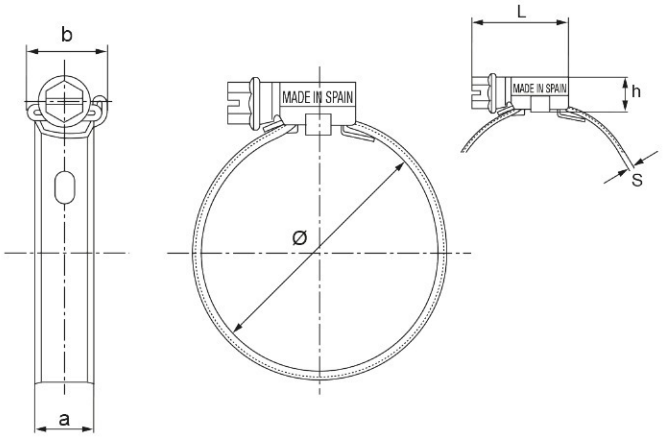

With the aim of minimising costs on the assembly line, particularly in the automotive sector, Mikalor has developed an ASFA clamp incorporating a pre-positioning hole in the band. This clamp works at the same tightening torque and guarantees the same performance as the standard range. The position of the hole in the band matches exactly that of the counterpart in the assembly, allowing the clamp to be safely and accurately pre-positioned for tightening when required. This pre-positioning feature can be used with all existing material qualities and diameters of the ASFA range. Moreover, the hole can be located in the most suitable place in the band for final assembly.

MATERIAL:	W4 - Steel AISI 304
FINISH:	Stainless steel
CORROSION RESISTANCE:	400 hours salt spray (ASTM B-117)

* Design, number of holes and position according to customer specifications.

* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

a	Ø Application mm	Part Number	L	S +0.1	H Max.	b Max.	Par (Bar)	Box Quantity
9	25-40	PDT2540PER-W4L	25,6	0,7	10	14	32	100
9	30-45	PDT3045PER-W4L	25,6	0,7	10	14	28	100
9	32-50	PDT325PER-W4L	25,6	0,7	10	14	24	100
9	40-60	PDT4060PER-W4L	25,6	0,7	10	14	19	100
9	50-70	PDT5070PER-W4L	29,6	0,7	10	14	17	100
9	60-80	PDT6080PER-W4L	29,6	0,7	10	14	15	100
9	70-90	PDT7090PER-W4L	29,6	0,7	10	14	13	50
9	80-100	PDT80100PER-W4L	29,6	0,7	10	14	11	50
9	90-110	PDT90110PER-W4L	29,6	0,7	10	14	10	50
9	100-120	PDT100120PER-W4L	29,6	0,7	10	14	9	50
9	110-130	PDT110130PER-W4L	29,6	0,7	10	14	8	50
9	120-140	PDT120140PER-W4L	29,6	0,7	10	14	7	50