
MIKALOR

W3 ASFA-L (9 mm) Hose Clamp with Pre-Assembly Clip



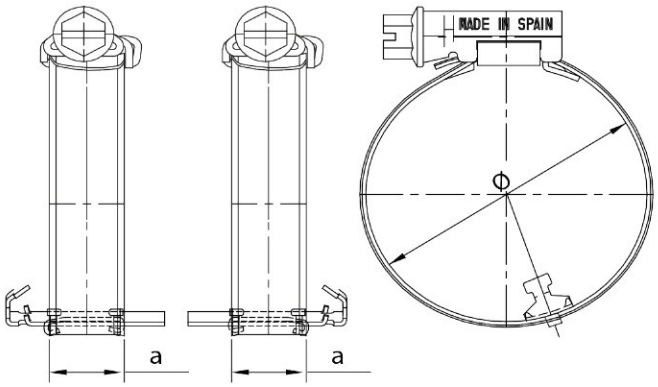

With the aim of saving time and increasing productivity on the assembly line, Mikalor has developed the only clamp of its kind capable of guaranteeing the same tightening torque values and the same performance as a standard clamp.

Thanks to its exclusive design, the pre-assembly clip can be fitted to the clamp and later attached to the hose without any loss of functionality, tightening torque or reduction in performance. Another new feature of our pre- positioning system is that the clip can also be fixed to the hose using adhesive. This is the only pre-assembly system which guarantees that the hose is not damaged when the clamp is tightened.

MATERIAL:	W3 - Steel AISI 430
FINISH:	Stainless steel
CORROSION RESISTANCE:	200 hours salt spray (ASTM B-117)

* Special dimensions and positioning of the clip according to customer requirements are available on request.

* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling

a	Ø Application mm	Part Number		Par (Bar)	Box Quantity
		Right	Left		
9	16-27	03046001	03047001	40	50
9	20-32	03046002	03047002	36	50
9	25-40	03046003	03047003	32	50
9	30-45	03046004	03047004	28	50
9	32-50	03046005	03047005	24	50
9	40-60	03046006	03047006	19	25
9	45-65	03046007	03047007	17	25
9	50-70	03046008	03047008	17	25
9	55-75	03046009	03047009	17	25
9	60-80	03046010	03047010	15	25
9	65-85	03046011	03047011	13	25
9	70-90	03046012	03047012	13	25
9	75-95	03046013	03047013	11	25
9	80-100	03046014	03047014	11	25