MIKALOR



W3

ASFA-L (9 mm) Hose Clamp Stainless Steel W3 Black DIN 3017


This clamp is manufactured in AISI 430 with an additional matt-black surface treatment which increases its corrosion resistance.

Thanks to the surface treatment, this clamp can be mounted discreetly in any application, making it a favourite in automotive or motorcycle applications. The geometry, band, stamping, housing and screw are identical to other ASFA clamps, meaning that the performance is not altered in any way.


DIN 3017. The Black ASFA LW3 hose clip complies fully with the DIN 3017 norm and also with the directive EU 2002/95/EC.

*** The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.**

							Maximum Values			
Ø D Application mm	Part Number	A +0.3 -0.2	L +1 -0.5	S ±0.1	H Max.	B Max.	Pressure (Bar)	Torque (Nm)	Box Quantity	Outer Box Quantity
8-16	73016011	9	22,1	0,65	10,5	14	45	3,0	200	800
12-22	73016020	9	22,1	0,65	10,5	14	45	3,0	200	800
16-27	73016038	9	23,6	0,75	10,5	14	42	3,5	200	800
20-32	73016046	9	23,6	0,75	10,5	14	36	3,5	200	800
25-40	73016062	9	25,6	0,75	10,5	14	32	4,0	100	800
30-45	73016070	9	25,6	0,75	10,5	14	28	4,0	100	800
32-50	73016089	9	25,6	0,75	10,5	14	24	4,0	100	800
40-60	73016095	9	25,6	0,75	10,5	14	19	4,0	100	400
50-70	73016100	9	29,6	0,75	10,5	14	17	4,0	100	100
60-80	73016118	9	29,6	0,75	10,5	14	15	4,0	100	100
70-90	73016126	9	29,6	0,75	10,5	14	13	4,0	50	400
80-100	73016134	9	29,6	0,75	10,5	14	11	4,0	50	50
90-110	73016142	9	29,6	0,75	10,5	14	11	4,0	25	200
100-120	73016150	9	29,6	0,75	10,5	14	11	4,0	25	200
110-130	73016169	9	29,6	0,75	10,5	14	11	4,0	25	25
120-140	73016177	9	29,6	0,75	10,5	14	11	4,0	25	200
130-150	73016185	9	29,6	0,75	10,5	14	11	4,0	25	25
140-160	73016193	9	29,6	0,75	10,5	14	11	4,0	25	25



TECHNICAL INFORMATION	
MATERIAL	Stainless steel band and housing W3 AISI 430 X6Cr17 (DIN 1.4016) Stainless steel screw W4 AISI 304 Cu
FINISH	Black Delta Seal
CORROSION RESISTANCE	250 hours salt spray (ASTM B-117)
MAX. TIGHTENING SPEED (RPM)	540 ± 5

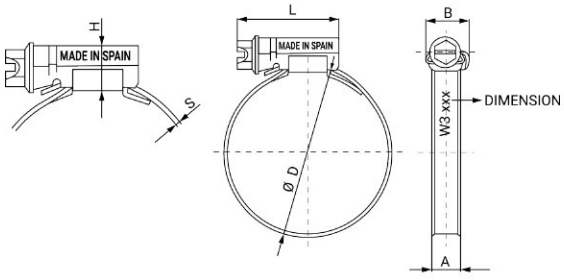

Available Through BORSERINI SRL

Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com

Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy