
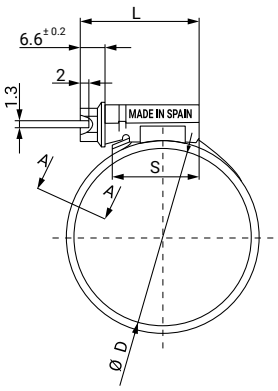
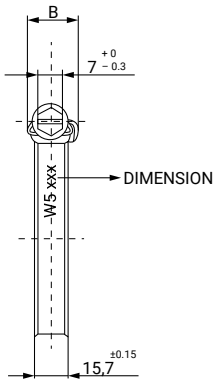
MIKALOR

# W5 ASFA S (12 mm) Hose Clamp with W4 inner-ring (plain finish)






ASFA S hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose.

**MATERIAL:** W5 Stainless steel
X5Cr Ni Mo 17.12.2
DIN 1.4401 ASI 316
Inner-ring: Stainless steel
AISI 301 DIN 1.4310


**CORROSION RESISTANCE:** 1000 hours salt spray (ASTM B-117)

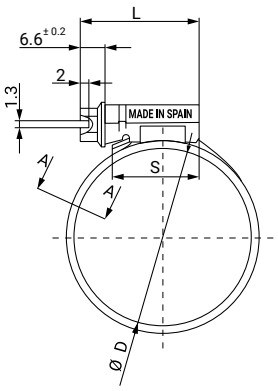
| Ø D Application +2 | Part Number | L +1-0.5 | T ±0.1 | H Max. | B Max. | S Min. | Max. Pressure Bar | Box Quantity | Outer Box Quantity |
|---|---|---|---|---|---|---|---|---|---|
| 16-27 | A3017720 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 45 | 50 | 50 |
| 20-32 | A3017500 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 45 | 50 | 50 |
| 25-40 | A3017519 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 40 | 50 | 50 |
| 30-45 | A3017738 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 35 | 50 | 50 |
| 32-50 | A3017527 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 35 | 50 | 50 |
| 40-60 | A3017535 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 30 | 50 | 50 |
| 50-70 | A3017543 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 25 | 50 | 50 |
| 60-80 | A3017551 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 20 | 50 | 50 |
| 70-90 | A3017560 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 17 | 50 | 50 |
| 80-100 | A3017578 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 14 | 25 | 25 |

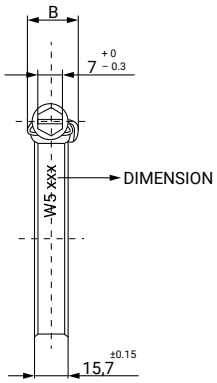
MIKALOR

# W5 ASFA S (12 mm) Hose Clamp with W4 inner-ring (plain finish)






| Ø D Application +2 | Part Number | L +1-0.5 | T ±0.1 | H Max. | B Max. | S Min. | Max. Pressure Bar | Box Quantity | Outer Box Quantity |
|---|---|---|---|---|---|---|---|---|---|
| 90-110 | A3017586 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 12 | 25 | 25 |
| 100-120 | A3017594 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 10 | 25 | 25 |
| 110-130 | A3017607 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 8 | 25 | 25 |
| 120-140 | A3017615 | 29,6 | 0,8 | 11 | 16,7 | 19,5 | 7 | 25 | 25 |
| 130-150 | A3017623 | 31,6 | 0,8 | 11 | 16,7 | 21,5 | 6 | 25 | 25 |
| 140-160 | A3017631 | 31,6 | 0,8 | 11 | 16,7 | 21,5 | 5 | 25 | 25 |
| 150-170 | A3017640 | 31,6 | 0,8 | 11 | 16,7 | 21,5 | 4 | 25 | 25 |
| 160-180 | A3017658 | 31,6 | 0,8 | 11 | 16,7 | 21,5 | 3 | 25 | 25 |
| 170-190 | A3017666 | 31,6 | 0,8 | 11 | 16,7 | 21,5 | 2 | 10 | 10 |
| 180-200 | A3017674 | 31,6 | 0,8 | 11 | 16,7 | 21,5 | 1,8 | 10 | 10 |
| 190-210 | A3017682 | 31,6 | 0,8 | 11 | 16,7 | 21,5 | 1,8 | 10 | 10 |
| 200-220 | A3017690 | 31,6 | 0,8 | 11 | 16,7 | 21,5 | 1,8 | 10 | 10 |
| 210-230 | A3017703 | 31,6 | 0,8 | 11 | 16,7 | 21,5 | 1,6 | 10 | 10 |
| 220-240 | A3017711 | 31,6 | 0,8 | 11 | 16,7 | 21,5 | 1,6 | 10 | 10 |