


MIKALOR

W1 ASFA L (9 mm) Hose Clamp with W4 inner-ring (plain finish)





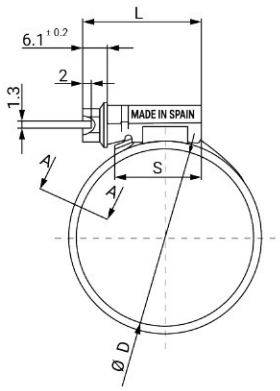

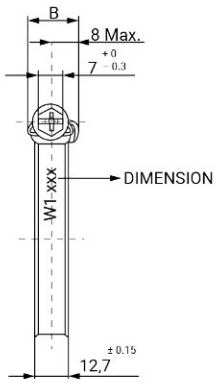

ASFA L hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose.

MATERIAL:	Galvanized steel DIN 1.0935 Bolt: Steel Qst 36-3 DIN 1.0214 Inner-ring: Stainless steel AISI 301 DIN 1.4310
FINISH:	Bolt: Zinc plated Cr3
CORROSION RESISTANCE:	144 hours salt spray (ASTM B-117)

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	A3008770	23,6	0,75	10,5	14	16,5	42	200	200
20-32	A3008788	23,6	0,75	10,5	14	16,5	36	200	200
25-40	A3008796	25,6	0,75	10,5	14	17,1	32	100	100
30-45	A3008809	25,6	0,75	10,5	14	17,1	28	100	100
32-50	A3008817	25,6	0,75	10,5	14	17,1	24	100	100
40-60	A3008825	25,6	0,75	10,5	14	17,1	19	100	100
50-70	A3008833	29,6	0,75	10,5	14	21,1	17	100	100
60-80	A3008841	29,6	0,75	10,5	14	21,1	15	100	100
70-90	A3008850	29,6	0,75	10,5	14	21,1	13	50	50
80-100	A3008868	29,6	0,75	10,5	14	21,1	11	50	50
90-110	A3008876	29,6	0,75	10,5	14	21,1	11	25	25
100-120	A3008884	29,6	0,75	10,5	14	21,1	11	25	25
110-130	A3008892	29,6	0,75	10,5	14	21,1	11	25	25
120-140	A3008905	29,6	0,75	10,5	14	21,1	11	25	25
130-150	A3008913	29,6	0,75	10,5	14	21,1	11	25	25
140-160	A3008921	29,6	0,75	10,5	14	21,1	11	25	25