


MIKALOR

W2 ASFA L (9 mm) Hose Clamp with W4 inner-ring (plain finish)





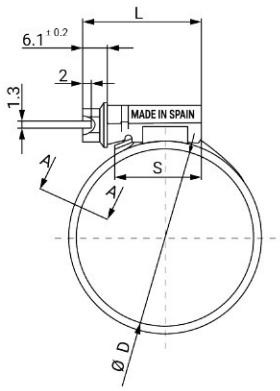

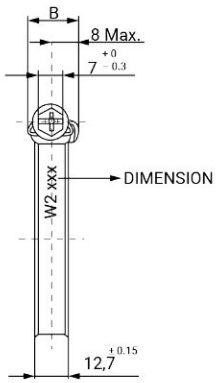

ASFA L hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose.

MATERIAL:	W2 Stainless steel X6Cr 17 DIN 1.4016 AISI 430 Bolt: Steel Qst 36-3 DIN 1.0214 Inner-ring: Stainless steel AISI 301 DIN 1.4310
FINISH:	Bolt: Zinc plated Cr3
CORROSION RESISTANCE:	72 hours salt spray (ASTM B-117)

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	A3016532	23,6	0,75	10,5	14	16,5	42	200	200
20-32	A3016540	23,6	0,75	10,5	14	16,5	36	200	200
25-40	A3016559	25,6	0,75	10,5	14	17,1	32	100	100
30-45	A3016567	25,6	0,75	10,5	14	17,1	28	100	100
32-50	A3016575	25,6	0,75	10,5	14	17,1	24	100	100
40-60	A3016583	25,6	0,75	10,5	14	17,1	19	100	100
50-70	A3016591	29,6	0,75	10,5	14	21,1	17	100	100
60-80	A3016604	29,6	0,75	10,5	14	21,1	15	100	100
70-90	A3016612	29,6	0,75	10,5	14	21,1	13	50	50
80-100	A3016620	29,6	0,75	10,5	14	21,1	11	50	50
90-110	A3016639	29,6	0,75	10,5	14	21,1	11	25	25
100-120	A3016647	29,6	0,75	10,5	14	21,1	11	25	25
110-130	A3016655	29,6	0,75	10,5	14	21,1	11	25	25
120-140	A3016663	29,6	0,75	10,5	14	21,1	11	25	25
130-150	A3016671	29,6	0,75	10,5	14	21,1	11	25	25
140-160	A3016680	29,6	0,75	10,5	14	21,1	11	25	25