MIKALOR



W2

ASFA-L (9 mm) Hose Clamp Stainless Steel W2 DIN 3017

Thanks to the exclusive design of the housing and the high- strength screw, the ASFA L Worm-Drive Clip has excellent performance while being at the same time very compact.


The cold-formed stamped 9 mm band, smoothed on the underside, combined with the bevelled band edges protects the hose from any damage.

DIN 3017. The ASFA L hose clip complies fully with the DIN 3017 norm and also with the directive EU 2002/95/EC.


*** The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.**

							Maximum Values			
Ø D Application mm	Part Number	A +0.3 -0.2	L +1 -0.5	S ±0.1	H Max.	B Max.	Pressure (Bar)	Torque (Nm)	Box Quantity	Outer Box Quantity
8-12(*)	03016508	7	18,5	0,4	9,2	11,5	15	1,5	200	1.600
8-16	03016516	9	22,1	0,6	10,5	14,0	45	3,0	200	800
12-22	03016524	9	22,1	0,6	10,5	14,0	45	3,0	200	800
16-27	03016532	9	23,6	0,7	10,5	14,0	42	3,5	200	800
20-32	03016540	9	23,6	0,7	10,5	14,0	36	3,5	200	800
25-40	03016559	9	25,6	0,7	10,5	14,0	32	4,0	100	400
30-45	03016567	9	25,6	0,7	10,5	14,0	28	4,0	100	800
32-50	03016575	9	25,6	0,7	10,5	14,0	24	4,0	100	800
40-60	03016583	9	25,6	0,7	10,5	14,0	19	4,0	100	400
50-70	03016591	9	29,6	0,7	10,5	14,0	17	4,0	100	100
60-80	03016604	9	29,6	0,7	10,5	14,0	15	4,0	100	100
70-90	03016612	9	29,6	0,7	10,5	14,0	13	4,0	50	50
80-100	03016620	9	29,6	0,7	10,5	14,0	11	4,0	50	50
90-110	03016639	9	29,6	0,7	10,5	14,0	10	4,0	25	200
100-120	03016647	9	29,6	0,7	10,5	14,0	9	4,0	25	200
110-130	03016655	9	29,6	0,7	10,5	14,0	8	4,0	25	25
120-140	03016663	9	29,6	0,7	10,5	14,0	7	4,0	25	25
130-150	03016671	9	29,6	0,7	10,5	14,0	6	4,0	25	25
140-160	03016680	9	29,6	0,7	10,5	14,0	5	4,0	25	25

(*) ASFA-L 7 mm hose clamp



TECHNICAL INFORMATION	
MATERIAL	Stainless steel band and housing W2 AISI 430 X6Cr17 (DIN 1.4016) Steel screw Qst 36-3 (DIN 1.0214) Zinc plated Cr3
CORROSION RESISTANCE	72 hours salt spray (ASTM B-117)
MAX. TIGHTENING SPEED (RPM)	540 ± 5

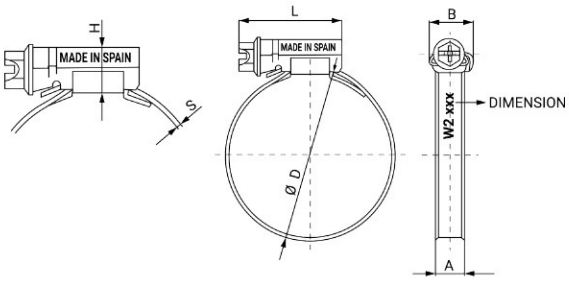

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy