MIKALOR



W5

ASFA-L (9 mm) Hose Clamp Stainless Steel W5 DIN 3017

Thanks to the exclusive design of the housing and the high- strength screw, the ASFA L Worm-Drive Clip has excellent performance while being at the same time very compact.


The cold-formed stamped 9 mm band, smoothed on the underside, combined with the bevelled band edges protects the hose from any damage.

DIN 3017. The ASFA L hose clip complies fully with the DIN 3017 norm and also with the directive EU 2002/95/EC.


*** The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.**

							Maximum Values			
Ø D Application mm	Part Number	A +0.3 -0.2	L +1 -0.5	S ±0.1	H Max.	B Max.	Pressure (Bar)	Torque (Nm)	Box Quantity	Outer Box Quantity
8-12(*)	03015748	7	18,5	0,40	9,2	11,5	15	1,5	200	1.600
8-16	03015759	9	22,1	0,65	10,5	14,0	45	3,0	200	800
12-22	03015767	9	22,1	0,65	10,5	14,0	45	3,0	200	800
16-27	03015775	9	23,6	0,75	10,5	14,0	42	3,5	200	800
20-32	03015783	9	23,6	0,75	10,5	14,0	36	3,5	200	800
25-40	03015804	9	25,6	0,75	10,5	14,0	32	4,0	100	800
30-45	03015812	9	25,6	0,75	10,5	14,0	28	4,0	100	800
32-50	03015820	9	25,6	0,75	10,5	14,0	24	4,0	100	800
40-60	03015839	9	25,6	0,75	10,5	14,0	19	4,0	100	400
50-70	03015847	9	29,6	0,75	10,5	14,0	17	4,0	100	100
60-80	03015855	9	29,6	0,75	10,5	14,0	15	4,0	100	100
70-90	03015863	9	29,6	0,75	10,5	14,0	13	4,0	50	50
80-100	03015871	9	29,6	0,75	10,5	14,0	11	4,0	50	50
90-110	03015880	9	29,6	0,75	10,5	14,0	10	4,0	25	200
100-120	03015898	9	29,6	0,75	10,5	14,0	9	4,0	25	200
110-130	03015900	9	29,6	0,75	10,5	14,0	8	4,0	25	25
120-140	03015919	9	29,6	0,75	10,5	14,0	7	4,0	25	25
130-150	03015927	9	29,6	0,75	10,5	14,0	6	4,0	25	25
140-160	03015935	9	29,6	0,75	10,5	14	5	4,0	25	25

(*) ASFA-L 7 mm hose clamp



TECHNICAL INFORMATION	
MATERIAL	Stainless steel band and housing W5 AISI 316 X5Cr Ni Mo (DIN 1.4401) Stainless steel screw W5 AISI 316 Cu
CORROSION RESISTANCE	1.000 hours salt spray (ASTM B-117)
MAX. TIGHTENING SPEED (RPM)	540 ± 5

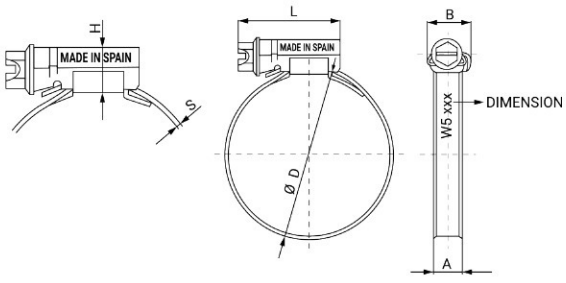

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy