


MIKALOR

W1 ASFA L (9 mm) Hose Clamp with W4 inner-ring (black finish)





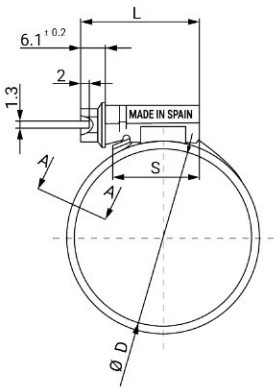

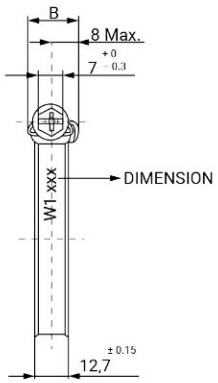

ASFA L hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose. The black finish is ideal for applications where the clamp is required to blend in with the rest of the assembly.

MATERIAL:	W1 Galvanized steel DIN 1.0935 Bolt: Steel Qst 36-3 DIN 1.0214 Inner-ring: Stainless steel AISI 301 DIN 1.4310
FINISH:	Clamp: Black Delta Seal Inner-ring: Black tefloned
CORROSION RESISTANCE:	144 hours salt spray (ASTM B-117)

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	AT008770	23,6	0,75	10,5	14	16,5	42	200	200
20-32	AT008788	23,6	0,75	10,5	14	16,5	36	200	200
25-40	AT008796	25,6	0,75	10,5	14	17,1	32	100	100
30-45	AT008809	25,6	0,75	10,5	14	17,1	28	100	100
32-50	AT008817	25,6	0,75	10,5	14	17,1	24	100	100
40-60	AT008825	25,6	0,75	10,5	14	17,1	19	100	100
50-70	AT008833	29,6	0,75	10,5	14	21,1	17	100	100
60-80	AT008841	29,6	0,75	10,5	14	21,1	15	100	100
70-90	AT008850	29,6	0,75	10,5	14	21,1	13	50	50
80-100	AT008868	29,6	0,75	10,5	14	21,1	11	50	50
90-110	AT008876	29,6	0,75	10,5	14	21,1	11	25	25
100-120	AT008884	29,6	0,75	10,5	14	21,1	11	25	25
110-130	AT008892	29,6	0,75	10,5	14	21,1	11	25	25
120-140	AT008905	29,6	0,75	10,5	14	21,1	11	25	25
130-150	AT008913	29,6	0,75	10,5	14	21,1	11	25	25
140-160	AT008921	29,6	0,75	10,5	14	21,1	11	25	25