


MIKALOR

W2 ASFA L (9 mm) Hose Clamp with W4 inner-ring (black finish)





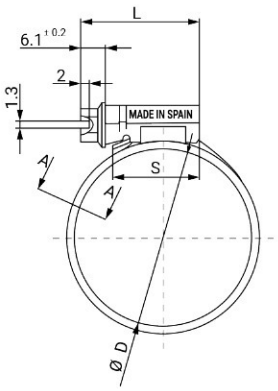

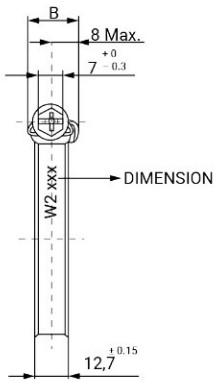

ASFA L hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose. The black finish is ideal for applications where the clamp is required to blend in with the rest of the assembly.

MATERIAL:	W2 Stainless steel X6Cr17 DIN 1.4016 AISI 430 Bolt: Steel Wst 36-3 DIN 1.0214 Inner-ring: Stainless steel DIN 1.4310 AISI 301
FINISH:	Clamp: Black Delta Seal Inner-ring: Black tefloned
CORROSION RESISTANCE:	72 hours salt spray (ASTM B-117)

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	AT016532	23,6	0,75	10,5	14	16,5	42	200	200
20-32	AT016540	23,6	0,75	10,5	14	16,5	36	200	200
25-40	AT016559	25,6	0,75	10,5	14	17,1	32	100	100
30-45	AT016567	25,6	0,75	10,5	14	17,1	28	100	100
32-50	AT016575	25,6	0,75	10,5	14	17,1	24	100	100
40-60	AT016583	25,6	0,75	10,5	14	17,1	19	100	100
50-70	AT016591	29,6	0,75	10,5	14	21,1	17	100	100
60-80	AT016604	29,6	0,75	10,5	14	21,1	15	100	100
70-90	AT016612	29,6	0,75	10,5	14	21,1	13	50	50
80-100	AT016620	29,6	0,75	10,5	14	21,1	11	50	50
90-110	AT016639	29,6	0,75	10,5	14	21,1	11	25	25
100-120	AT016647	29,6	0,75	10,5	14	21,1	11	25	25
110-130	AT016655	29,6	0,75	10,5	14	21,1	11	25	25
120-140	AT016663	29,6	0,75	10,5	14	21,1	11	25	25
130-150	AT016671	29,6	0,75	10,5	14	21,1	11	25	25
140-160	AT016680	29,6	0,75	10,5	14	21,1	11	25	25