


MIKALOR

W5 ASFA L (9 mm) Hose Clamp with W4 inner-ring (black finish)





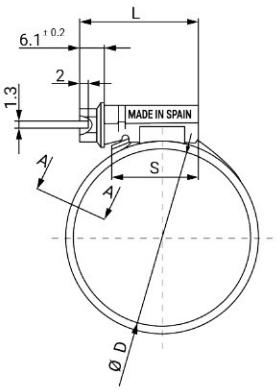

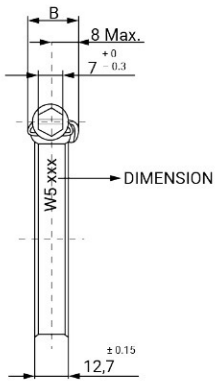

ASFA L hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose. The black finish is ideal for applications where the clamp is required to blend in with the rest of the assembly.

MATERIAL:	W5 Stainless steel X5Cr Ni Mo 17.12.2 DIN 1.4401 AISI 316 Inner-ring: Stainless steel DIN 1.4310 AISI 301
FINISH:	Clamp: Black Delta Seal Inner-ring: Black tefloned
CORROSION RESISTANCE:	1000 hours salt spray (ASTM B-117)

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	AT015775	23,6	0,75	10,5	14	16,5	42	200	200
20-32	AT015783	23,6	0,75	10,5	14	16,5	36	200	200
25-40	AT015804	25,6	0,75	10,5	14	17,1	32	100	100
30-45	AT015812	25,6	0,75	10,5	14	17,1	28	100	100
32-50	AT015820	25,6	0,75	10,5	14	17,1	24	100	100
40-60	AT015839	25,6	0,75	10,5	14	17,1	19	100	100
50-70	AT015847	29,6	0,75	10,5	14	21,1	17	100	100
60-80	AT015855	29,6	0,75	10,5	14	21,1	15	100	100
70-90	AT015863	29,6	0,75	10,5	14	21,1	13	50	50
80-100	AT015871	29,6	0,75	10,5	14	21,1	11	50	50
90-110	AT015880	29,6	0,75	10,5	14	21,1	11	25	25
100-120	AT015898	29,6	0,75	10,5	14	21,1	11	25	25
110-130	AT015900	29,6	0,75	10,5	14	21,1	11	25	25
120-140	AT015919	29,6	0,75	10,5	14	21,1	11	25	25
130-150	AT015927	29,6	0,75	10,5	14	21,1	11	25	25
140-160	AT015935	29,6	0,75	10,5	14	21,1	11	25	25