MIKALOR



W1


ASFA-L (7 mm) Hose Clamp W1

The ASFA L7 is the smallest worm-drive hose clamp in the Mikalor range and, dare we say it, in the world. This clamp has been developed for use in applications where a standard clamp cannot be used due to a shortage of space. It is manufactured using the same technology and production processes as the current 9mm and 12mm ASFA ranges and is subject to the standards and quality controls specified by ISO 9001 and IATF 16949.

As this is a very compact clamp, we have had to adapt the housing and screw in order to reach a clamping force of up to 1.5Nm. This clamping force ensures total leaktightness. The 6mm cylindrical screw, manufactured by Mikalor exclusively for the L7 clamp, means that there is no need for an excessive and unnecessary application of torque.

						Maximum Values			
Ø D Application mm	Part Number	L +1 -0.5	H Max.	B Max.	A ±0.3	Pressure (Bar)	Torque (Nm)	Box Quantity	Outer Box Quantity
8-12	03008745	18,5	9,2	11,5	7	15	1,5	200	1.600
10-16	03008746	18,5	9,2	11,5	7	15	1,5	200	800
12-22	03008747	18,5	9,2	11,5	7	15	1,5	200	800
16-27	03008748	18,5	9,2	11,5	7	15	1,5	200	800
20-32	03008749	18,5	9,2	11,5	7	15	1,5	200	800
25-40	03008750	18,5	9,2	11,5	7	15	1,5	100	400

TECHNICAL INFORMATION	
MATERIAL	Steel band and housing W1 (DIN 1.0935) Steel screw Qst 36-3 (DIN 1.0214)
FINISH	Galvanized
CORROSION RESISTANCE	144 hours salt spray (ASTM B-117)
MAX. TIGHTENING SPEED (RPM)	150 ±5

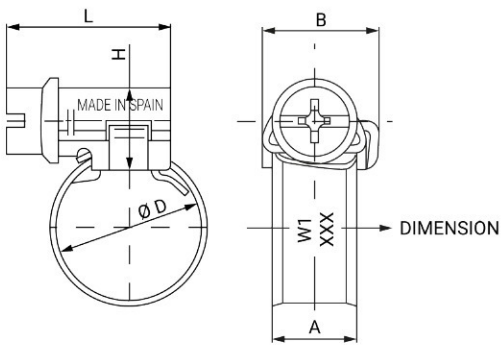

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy