MIKALOR



W2


ASFA-L (7 mm) Hose Clamp W2

The ASFA L7 is the smallest worm-drive hose clamp in the Mikalor range and, dare we say it, in the world. This clamp has been developed for use in applications where a standard clamp cannot be used due to a shortage of space. It is manufactured using the same technology and production processes as the current 9mm and 12mm ASFA ranges and is subject to the standards and quality controls specified by ISO 9001 and IATF 16949.

As this is a very compact clamp, we have had to adapt the housing and screw in order to reach a clamping force of up to 1.5Nm. This clamping force ensures total leaktightness. The 6mm cylindrical screw, manufactured by Mikalor exclusively for the L7 clamp, means that there is no need for an excessive and unnecessary application of torque.

						Maximum Values			
Ø D Application mm	Part Number	L +1 -0.5	H Max.	B Max.	A ±0.3	Pressure (Bar)	Torque (Nm)	Box Quantity	Outer Box Quantity
8-12	03016508	18,5	9,2	11,5	7	15	1,5	200	1.600
10-16	03016509	18,5	9,2	11,5	7	15	1,5	200	800
12-22	03016510	18,5	9,2	11,5	7	15	1,5	200	800
16-27	03016511	18,5	9,2	11,5	7	15	1,5	200	800
20-32	03016512	18,5	9,2	11,5	7	15	1,5	200	800
25-40	03016513	18,5	9,2	11,5	7	15	1,5	100	400

	TECHNICAL INFORMATION	
	MATERIAL	Stainless steel band and housing X6Cr17 W2 AISI 430 (DIN 1.4016) Steel screw Qst 36-3 (DIN 1.0213)
	FINISH	Zinc plated Cr3 Screw
	CORROSION RESISTANCE	72 hours salt spray (ASTM B-117)
	MAX. TIGHTENING SPEED (RPM)	150 ±5

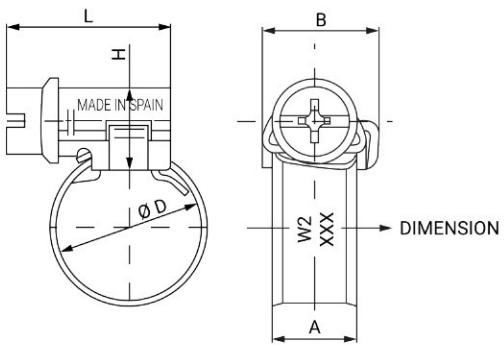

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy