MIKALOR



W3

ASFA-S (12 mm) Hose Clamp Stainless Steel W3 Black DIN 3017


This clamp is manufactured in AISI 430 with an additional matt-black surface treatment which increases its corrosion resistance.

Thanks to the surface treatment, this clamp can be mounted discreetly in any application, making it a favourite in automotive or motorcycle applications. The geometry, band, stamping, housing and screw are identical to other ASFA clamps, meaning that the performance is not altered in any way.


DIN 3017. The Black ASFA S W3 hose clip complies fully with the DIN 3017 norm, and also with the directive EU 2002/95/EC.

*** The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.**

							Maximum Values			
Ø D Application mm	Part Number	A +0.3 -0.2	L +1 -0.5	S ±0.1	H Max.	B Max.	Pressure (Bar)	Torque (Nm)	Box Quantity	Outer Box Quantity
16-27	73016206	12	29,6	0,8	11	16,7	45,0	4,5	50	400
20-32	73016214	12	29,6	0,8	11	16,7	45,0	5,5	50	400
25-40	73016222	12	29,6	0,8	11	16,7	40,0	5,5	50	400
30-45	73016230	12	29,6	0,8	11	16,7	35,0	5,5	50	400
32-50	73016249	12	29,6	0,8	11	16,7	35,0	6,0	50	200
40-60	73016257	12	29,6	0,8	11	16,7	30,0	6,0	50	400
50-70	73016265	12	29,6	0,8	11	16,7	25,0	7,0	50	400
60-80	73016273	12	29,6	0,8	11	16,7	20,0	7,0	50	50
70-90	73016281	12	29,6	0,8	11	16,7	17,0	7,0	50	50
80-100	73016290	12	29,6	0,8	11	16,7	14,0	7,0	25	200
90-110	73016302	12	29,6	0,8	11	16,7	12,0	7,0	25	200
100-120	73016310	12	29,6	0,8	11	16,7	10,0	7,0	25	200
110-130	73016329	12	29,6	0,8	11	16,7	8,0	7,0	25	25
120-140	73016337	12	29,6	0,8	11	16,7	7,0	7,0	25	25
130-150	73016345	12	31,6	0,8	11	16,7	6,0	7,0	25	25
140-160	73016353	12	31,6	0,8	11	16,7	6,0	7,0	25	25
150-170	73016361	12	31,6	0,8	11	16,7	6,0	7,0	25	25
160-180	73016379	12	31,6	0,8	11	16,7	3,0	7,0	10	10
170-190	73016387	12	31,6	0,8	11	16,7	3,0	7,0	10	10
180-200	73016396	12	31,6	0,8	11	16,7	2,0	7,0	10	10



TECHNICAL INFORMATION	
MATERIAL	Stainless steel band and housing W3 AISI 430 X6Cr17 (DIN 1.4016) Stainless steel screw W4 AISI 304 Cu
CORROSION RESISTANCE	250 hours salt spray (ASTM B-117)
MAX. TIGHTENING SPEED (RPM)	540 ± 5

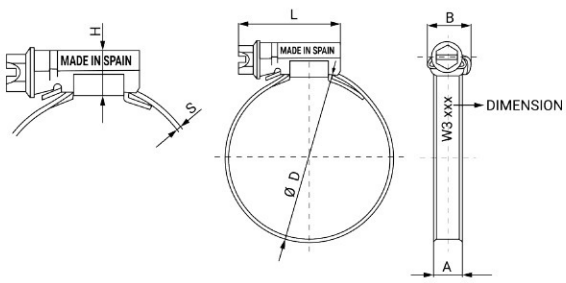

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy