MIKALOR



W5

ASFA-S (12 mm) Hose Clamp Stainless Steel W5 DIN 3017

This clamp represents the latest stage in the evolution of the ASFA 12mm range. One of the main developments in this version is the lateral displacement of the band thread, which reduces the tendency of the band end to exit the housing off-centre when tightened. Thanks to the combination of the housing, the locking system and the location of the screw within the housing, this clamp offers superior performance at the same torque ratings.

Specially recommended for industrial applications.
The ASFA S hose clip complies fully with the DIN 3017 norm and also with the directive EU 2002/95/EC.

*** The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.**

							Maximum Values			
Ø D Application mm	**Part Number**	**A +0.3 -0.2**	**L +1 -0.5**	**S ±0.1**	**H Max.**	**B Max.**	**Pressure (Bar)**	**Torque (Nm)**	**Box Quantity**	**Outer Box Quantity**
16-27	03017720	12	29,6	0,8	11	16,7	45,0	5,0	50	400
20-32	03017500	12	29,6	0,8	11	16,7	45,0	6,0	50	400
25-40	03017519	12	29,6	0,8	11	16,7	40,0	6,0	50	400
30-45	03017738	12	29,6	0,8	11	16,7	35,0	6,0	50	400
32-50	03017527	12	29,6	0,8	11	16,7	35,0	6,5	50	200
40-60	03017535	12	29,6	0,8	11	16,7	30,0	6,5	50	400
50-70	03017543	12	29,6	0,8	11	16,7	25,0	7,5	50	400
60-80	03017551	12	29,6	0,8	11	16,7	20,0	7,5	50	50
70-90	03017560	12	29,6	0,8	11	16,7	17,0	7,5	50	50
80-100	03017578	12	29,6	0,8	11	16,7	14,0	7,5	25	200
90-110	03017586	12	29,6	0,8	11	16,7	12,0	7,5	25	200
100-120	03017594	12	29,6	0,8	11	16,7	10,0	7,5	25	200
110-130	03017607	12	29,6	0,8	11	16,7	8,0	7,5	25	25
120-140	03017615	12	29,6	0,8	11	16,7	7,0	7,5	25	25
130-150	03017623	12	29,6	0,8	11	16,7	7,0	7,5	25	25
140-160	03017631	12	31,6	0,8	11	16,7	7,0	7,5	25	25
150-170	03017640	12	31,6	0,8	11	16,7	7,0	7,5	25	25
160-180	03017658	12	31,6	0,8	11	16,7	7,0	7,5	25	25
170-190	03017666	12	31,6	0,8	11	16,7	2,0	7,5	10	10

MIKALOR



W5


ASFA-S (12 mm) Hose Clamp Stainless Steel W5 DIN 3017

This clamp represents the latest stage in the evolution of the ASFA 12mm range. One of the main developments in this version is the lateral displacement of the band thread, which reduces the tendency of the band end to exit the housing off-centre when tightened. Thanks to the combination of the housing, the locking system and the location of the screw within the housing, this clamp offers superior performance at the same torque ratings.


Specially recommended for industrial applications.
The ASFA S hose clip complies fully with the DIN 3017 norm and also with the directive EU 2002/95/EC.

*** The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.**

							Maximum Values			
Ø D Application mm	Part Number	A +0.3 -0.2	L +1 -0.5	S ±0.1	H Max.	B Max.	Pressure (Bar)	Torque (Nm)	Box Quantity	Outer Box Quantity
180-200	03017674	12	31,6	0,8	11	16,7	2,0	7,5	10	10
190-210	03017682	12	31,6	0,8	11	16,7	1,8	7,5	10	10
200-220	03017690	12	31,6	0,8	11	16,7	1,8	7,5	10	10
210-230	03017703	12	31,6	0,8	11	16,7	1,6	7,5	10	10
220-240	03017711	12	31,6	0,8	11	16,7	1,6	7,5	10	10
230-250	03017746	12	31,6	0,8	11	16,7	1,6	7,5	10	10
240-260	03017765	12	31,6	0,8	11	16,7	1,6	7,5	10	10
250-270	03017754	12	31,6	0,8	11	16,7	1,6	7,5	10	10
260-280	03017776	12	31,6	0,8	11	16,7	1,6	7,5	10	10
270-290	03017787	12	31,6	0,8	11	16,7	1,6	7,5	10	10
280-300	03017798	12	31,6	0,8	11	16,7	1,6	7,5	10	10
290-310	03017799	12	31,6	0,8	11	16,7	1,6	7,5	10	10



TECHNICAL INFORMATION	
MATERIAL	Stainless steel band and housing W5 AISI 316 X5Cr Ni Mo (DIN 1.4401) Stainless steel screw W5 AISI 316 Cu (DIN 1.4578)
CORROSION RESISTANCE	1.000 hours salt spray (ASTM B-117)
MAX. TIGHTENING SPEED (RPM)	540 ± 5

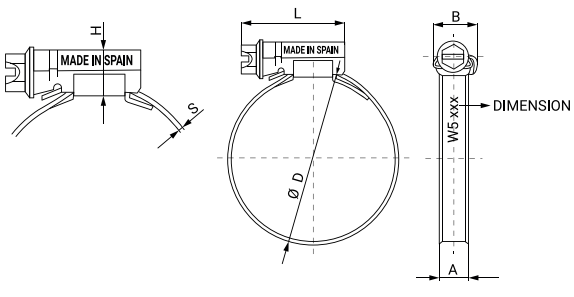

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy