


MIKALOR

W2 ASFA S (12 mm) Hose Clamp with W4 inner-ring (black finish)





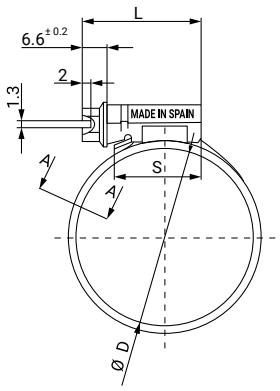

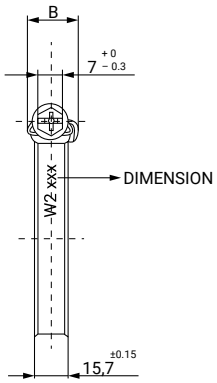

ASFA S hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose. The black finish is ideal for applications where the clamp is required to blend in with the rest of the assembly.

* The maximum application pressure can vary depending on the type of hose and the geometry of the coupling.


MATERIAL:	W2 Stainless steel X6Cr17 DIN 1.4016 AISI 430 Bolt: Steel Wst 36-3 DIN 1.0214 Inner-ring: Stainless steel DIN 1.4310 AISI 301
FINISH:	Clamp: Black Delta Seal Inner-ring: Black tefloned
CORROSION RESISTANCE:	72 hours salt spray (ASTM B-117)


Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	AT017017	29,6	0,85	11	16,7	19,5	45	50	50
20-32	AT017025	29,6	0,85	11	16,7	19,5	45	50	50
25-40	AT017033	29,6	0,85	11	16,7	19,5	40	50	50
30-45	AT017009	29,6	0,85	11	16,7	19,5	35	50	50
32-50	AT017041	29,6	0,85	11	16,7	19,5	35	50	50
40-60	AT017050	29,6	0,85	11	16,7	19,5	30	50	50
50-70	AT017068	29,6	0,85	11	16,7	19,5	25	50	50
60-80	AT017076	29,6	0,85	11	16,7	19,5	20	50	50
70-90	AT017084	29,6	0,85	11	16,7	19,5	17	50	50
80-100	AT017092	29,6	0,85	11	16,7	19,5	14	25	25


MIKALOR

W2 ASFA S (12 mm) Hose Clamp with W4 inner-ring (black finish)





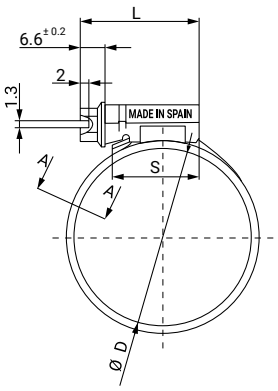

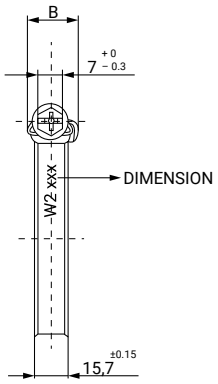

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
90-110	AT017105	29,6	0,85	11	16,7	19,5	12	25	25
100-120	AT017113	29,6	0,85	11	16,7	19,5	10	25	25
110-130	AT017121	29,6	0,85	11	16,7	19,5	8	25	25
120-140	AT017130	29,6	0,85	11	16,7	19,5	7	25	25
130-150	AT017148	31,6	0,85	11	16,7	21,5	6	25	25
140-160	AT017156	31,6	0,85	11	16,7	21,5	5	25	25
150-170	AT017164	31,6	0,85	11	16,7	21,5	4	25	25
160-180	AT017172	31,6	0,85	11	16,7	21,5	3	25	25
170-190	AT017180	31,6	0,85	11	16,7	21,5	2	10	10
180-200	AT017199	31,6	0,85	11	16,7	21,5	1,8	10	10
190-210	AT017201	31,6	0,85	11	16,7	21,5	1,8	10	10
200-220	AT017210	31,6	0,85	11	16,7	21,5	1,8	10	10
210-230	AT017228	31,6	0,85	11	16,7	21,5	1,6	10	10
220-240	AT017236	31,6	0,85	11	16,7	21,5	1,6	10	10