


MIKALOR

W3 ASFA S (12 mm) Hose Clamp with W4 inner-ring (black finish)





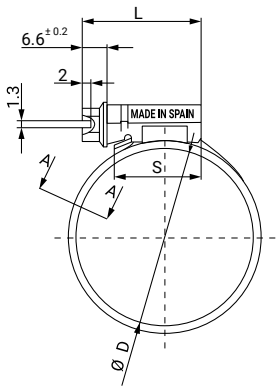

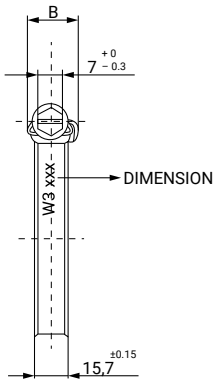

ASFA S hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose. The black finish is ideal for applications where the clamp is required to blend in with the rest of the assembly.

* The maximum application pressure can vary depending on the type of hose and the geometry of the coupling.


MATERIAL:	W3 Stainless steel X6Cr17 DIN 1.4016 AISI 430 Bolt: Stainless steel ASI 304 Cu Inner-ring: Stainless steel DIN 1.4310 AISI 301
FINISH:	Clamp: Black Delta Seal Inner-ring: Black tefloned
CORROSION RESISTANCE:	200 hours salt spray (ASTM B-117)


Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	AT016209	29,6	0,85	11	16,7	19,5	45	50	50
20-32	AT016217	29,6	0,85	11	16,7	19,5	45	50	50
25-40	AT016225	29,6	0,85	11	16,7	19,5	40	50	50
30-45	AT016233	29,6	0,85	11	16,7	19,5	35	50	50
32-50	AT016241	29,6	0,85	11	16,7	19,5	35	50	50
40-60	AT016250	29,6	0,85	11	16,7	19,5	30	50	50
50-70	AT016268	29,6	0,85	11	16,7	19,5	25	50	50
60-80	AT016276	29,6	0,85	11	16,7	19,5	20	50	50
70-90	AT016284	29,6	0,85	11	16,7	19,5	17	50	50
80-100	AT016292	29,6	0,85	11	16,7	19,5	14	25	25


MIKALOR

W3 ASFA S (12 mm) Hose Clamp with W4 inner-ring (black finish)





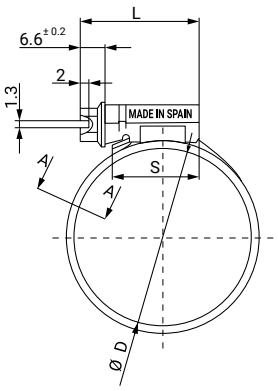

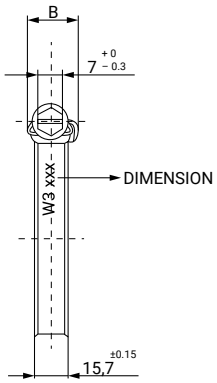

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
90-110	AT016305	29,6	0,85	11	16,7	19,5	12	25	25
100-120	AT016313	29,6	0,85	11	16,7	19,5	10	25	25
110-130	AT016321	29,6	0,85	11	16,7	19,5	8	25	25
120-140	AT016330	29,6	0,85	11	16,7	19,5	7	25	25
130-150	AT016348	31,6	0,85	11	16,7	21,5	6	25	25
140-160	AT016356	31,6	0,85	11	16,7	21,5	5	25	25
150-170	AT016364	31,6	0,85	11	16,7	21,5	4	25	25
160-180	AT016372	31,6	0,85	11	16,7	21,5	3	25	25
170-190	AT016380	31,6	0,85	11	16,7	21,5	2	10	10
180-200	AT016399	31,6	0,85	11	16,7	21,5	1,8	10	10
190-210	AT016428	31,6	0,85	11	16,7	21,5	1,8	10	10
200-220	AT016436	31,6	0,85	11	16,7	21,5	1,8	10	10
210-230	AT016444	31,6	0,85	11	16,7	21,5	1,6	10	10
220-240	AT016452	31,6	0,85	11	16,7	21,5	1,6	10	10