


MIKALOR

W4 ASFA S (12 mm) Hose Clamp with W4 inner-ring (black finish)





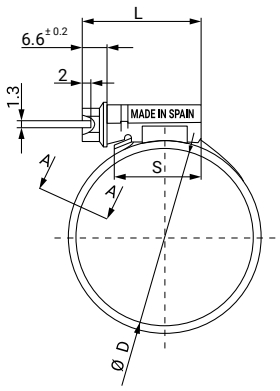

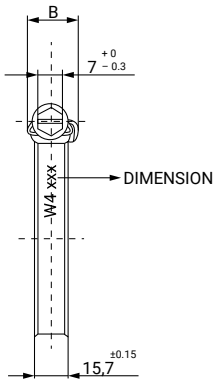

ASFA S hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose. The black finish is ideal for applications where the clamp is required to blend in with the rest of the assembly.

* The maximum application pressure can vary depending on the type of hose and the geometry of the coupling.


MATERIAL:	W4 Stainless steel X5Cr Ni 18/10 DIN 1.4301 AISI 304 Inner-ring: Stainless stee DIN 1.4310 AISI 301
FINISH:	Clamp: Black Delta Seal Inner-ring: Black tefloned
CORROSION RESISTANCE:	400 hours salt spray (ASTM B-117)


Ø D Application +2	**Part Number**	**L** +1-0.5	**T** ±0.1	**H** Max.	**B** Max.	**S** Min.	**Max. Pressure** Bar	**Box Quantity**	**Outer Box Quantity**
16-27	AT014730	29,6	0,8	11	16,7	19,5	45	50	50
20-32	AT014510	29,6	0,8	11	16,7	19,5	45	50	50
25-40	AT014529	29,6	0,8	11	16,7	19,5	40	50	50
30-45	AT014748	29,6	0,8	11	16,7	19,5	35	50	50
32-50	AT014537	29,6	0,8	11	16,7	19,5	35	50	50
40-60	AT014545	29,6	0,8	11	16,7	19,5	30	50	50
50-70	AT014553	29,6	0,8	11	16,7	19,5	25	50	50
60-80	AT014561	29,6	0,8	11	16,7	19,5	20	50	50
70-90	AT014570	29,6	0,8	11	16,7	19,5	17	50	50
80-100	AT014588	29,6	0,8	11	16,7	19,5	14	25	25


MIKALOR

W4 ASFA S (12 mm) Hose Clamp with W4 inner-ring (black finish)





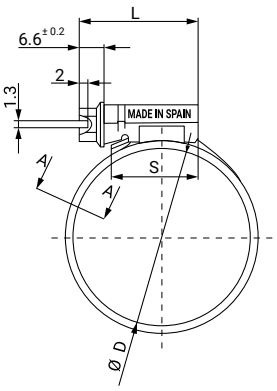

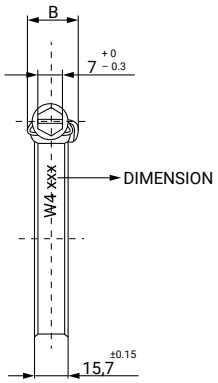

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
90-110	AT014596	29,6	0,8	11	16,7	19,5	12	25	25
100-120	AT014609	29,6	0,8	11	16,7	19,5	10	25	25
110-130	AT014617	29,6	0,8	11	16,7	19,5	8	25	25
120-140	AT014625	29,6	0,8	11	16,7	19,5	7	25	25
130-150	AT014633	31,6	0,8	11	16,7	21,5	6	25	25
140-160	AT014641	31,6	0,8	11	16,7	21,5	5	25	25
150-170	AT014650	31,6	0,8	11	16,7	21,5	4	25	25
160-180	AT014668	31,6	0,8	11	16,7	21,5	3	25	25
170-190	AT014676	31,6	0,8	11	16,7	21,5	2	10	10
180-200	AT014684	31,6	0,8	11	16,7	21,5	1,8	10	10
190-210	AT014692	31,6	0,8	11	16,7	21,5	1,8	10	10
200-220	AT014705	31,6	0,8	11	16,7	21,5	1,8	10	10
210-230	AT014713	31,6	0,8	11	16,7	21,5	1,6	10	10
220-240	AT014721	31,6	0,8	11	16,7	21,5	1,6	10	10