


MIKALOR

W5 ASFA S (12 mm) Hose Clamp with W4 inner-ring (black finish)





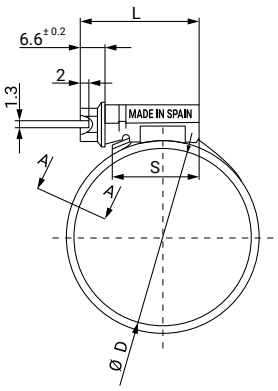

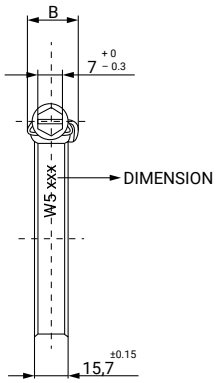

ASFA S hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose. The black finish is ideal for applications where the clamp is required to blend in with the rest of the assembly.

* The maximum application pressure can vary depending on the type of hose and the geometry of the coupling.


MATERIAL:	W5 Stainless steel X5Cr Ni Mo 17.12.2 DIN 1.4401 AISI 316 Inner-ring: Stainless steel DIN 1.4310 AISI 301
FINISH:	Clamp: Black Delta Seal Inner-ring: Black tefloned
CORROSION RESISTANCE:	1000 hours salt spray (ASTM B-117)


Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	AT017720	29,6	0,8	11	16,7	19,5	45	50	50
20-32	AT017500	29,6	0,8	11	16,7	19,5	45	50	50
25-40	AT017519	29,6	0,8	11	16,7	19,5	40	50	50
30-45	AT017538	29,6	0,8	11	16,7	19,5	35	50	50
32-50	AT017527	29,6	0,8	11	16,7	19,5	35	50	50
40-60	AT017535	29,6	0,8	11	16,7	19,5	30	50	50
50-70	AT017543	29,6	0,8	11	16,7	19,5	25	50	50
60-80	AT017551	29,6	0,8	11	16,7	19,5	20	50	50
70-90	AT017560	29,6	0,8	11	16,7	19,5	17	50	50
80-100	AT017578	29,6	0,8	11	16,7	19,5	14	25	25


MIKALOR

W5 ASFA S (12 mm) Hose Clamp with W4 inner-ring (black finish)





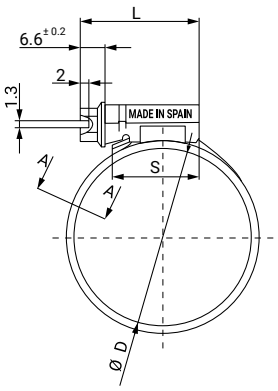

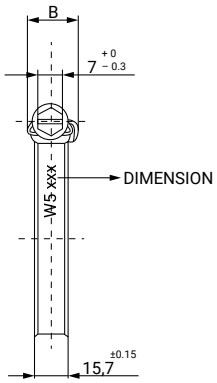

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
90-110	AT017586	29,6	0,8	11	16,7	19,5	12	25	25
100-120	AT017594	29,6	0,8	11	16,7	19,5	10	25	25
110-130	AT017607	29,6	0,8	11	16,7	19,5	8	25	25
120-140	AT017615	29,6	0,8	11	16,7	19,5	7	25	25
130-150	AT017623	31,6	0,8	11	16,7	21,5	6	25	25
140-160	AT017631	31,6	0,8	11	16,7	21,5	5	25	25
150-170	AT017640	31,6	0,8	11	16,7	21,5	4	25	25
160-180	AT017658	31,6	0,8	11	16,7	21,5	3	25	25
170-190	AT017666	31,6	0,8	11	16,7	21,5	2	10	10
180-200	AT017674	31,6	0,8	11	16,7	21,5	1,8	10	10
190-210	AT017682	31,6	0,8	11	16,7	21,5	1,8	10	10
200-220	AT017690	31,6	0,8	11	16,7	21,5	1,8	10	10
210-230	AT017703	31,6	0,8	11	16,7	21,5	1,6	10	10
220-240	AT017711	31,6	0,8	11	16,7	21,5	1,6	10	10