


MIKALOR

W2 ASFA S (12 mm) Hose Clamp with W4 inner-ring (plain finish)





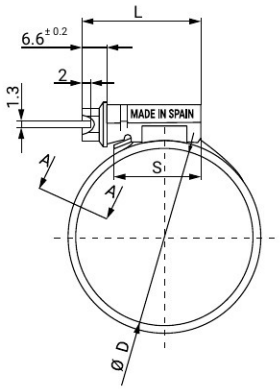

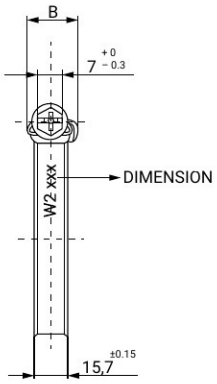

ASFA S hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose.


MATERIAL:	W2 Stainless steel X6Cr 17 DIN 1.4016 AISI 430 Bolt: Steel Qst 36-3 DIN 1.0214 Inner-ring: Stainless steel AISI 301 DIN 1.4310
FINISH:	Bolt: Zinc plated Cr3
CORROSION RESISTANCE:	72 hours salt spray (ASTM B-117)


Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	A3017017	29,6	0,85	11	16,7	19,5	45	50	50
20-32	A3017025	29,6	0,85	11	16,7	19,5	45	50	50
25-40	A3017033	29,6	0,85	11	16,7	19,5	40	50	50
30-45	A3017009	29,6	0,85	11	16,7	19,5	35	50	50
32-50	A3017041	29,6	0,85	11	16,7	19,5	35	50	50
40-60	A3017050	29,6	0,85	11	16,7	19,5	30	50	50
50-70	A3017068	29,6	0,85	11	16,7	19,5	25	50	50
60-80	A3017076	29,6	0,85	11	16,7	19,5	20	50	50
70-90	A3017084	29,6	0,85	11	16,7	19,5	17	50	50
80-100	A3017092	29,6	0,85	11	16,7	19,5	14	25	25


MIKALOR

W2 ASFA S (12 mm) Hose Clamp with W4 inner-ring (plain finish)





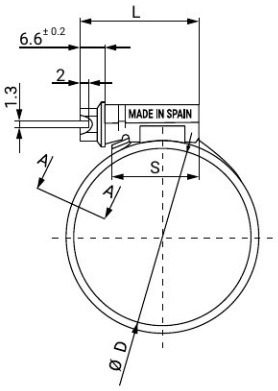

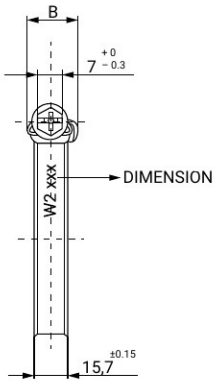

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
90-110	A3017105	29,6	0,85	11	16,7	19,5	12	25	25
100-120	A3017113	29,6	0,85	11	16,7	19,5	10	25	25
110-130	A3017121	29,6	0,85	11	16,7	19,5	8	25	25
120-140	A3017130	29,6	0,85	11	16,7	19,5	7	25	25
130-150	A3017148	31,6	0,85	11	16,7	21,5	6	25	25
140-160	A3017156	31,6	0,85	11	16,7	21,5	5	25	25
150-170	A3017164	31,6	0,85	11	16,7	21,5	4	25	25
160-180	A3017172	31,6	0,85	11	16,7	21,5	3	25	25
170-190	A3017180	31,6	0,85	11	16,7	21,5	2	10	10
180-200	A3017199	31,6	0,85	11	16,7	21,5	1,8	10	10
190-210	A3017201	31,6	0,85	11	16,7	21,5	1,8	10	10
200-220	A3017210	31,6	0,85	11	16,7	21,5	1,8	10	10
210-230	A3017228	31,6	0,85	11	16,7	21,5	1,6	10	10
220-240	A3017236	31,6	0,85	11	16,7	21,5	1,6	10	10