


MIKALOR

W3 ASFA S (12 mm) Hose Clamp with W4 inner-ring (plain finish)





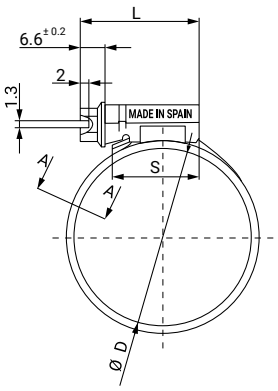

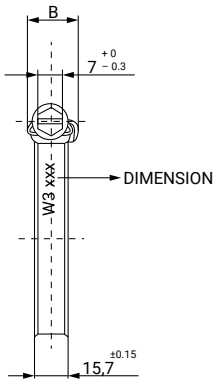

ASFA S hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose.


MATERIAL:	W3 Stainless steel X6Cr17 DIN 1.4016 AISI 430 Bolt: Stainless stee AISI 304 Cu Inner-ring: Stainless steel AISI 301 DIN 1.4310
CORROSION RESISTANCE:	200 hours salt spray (ASTM B-117)


Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	A3016209	29,6	0,8	11	16,7	19,5	45	50	50
20-32	A3016217	29,6	0,8	11	16,7	19,5	45	50	50
25-40	A3016225	29,6	0,8	11	16,7	19,5	40	50	50
30-45	A3016233	29,6	0,8	11	16,7	19,5	35	50	50
32-50	A3016241	29,6	0,8	11	16,7	19,5	35	50	50
40-60	A3016250	29,6	0,8	11	16,7	19,5	30	50	50
50-70	A3016268	29,6	0,8	11	16,7	19,5	25	50	50
60-80	A3016276	29,6	0,8	11	16,7	19,5	20	50	50
70-90	A3016284	29,6	0,8	11	16,7	19,5	17	50	50
80-100	A3016292	29,6	0,8	11	16,7	19,5	14	25	25


MIKALOR

W3 ASFA S (12 mm) Hose Clamp with W4 inner-ring (plain finish)





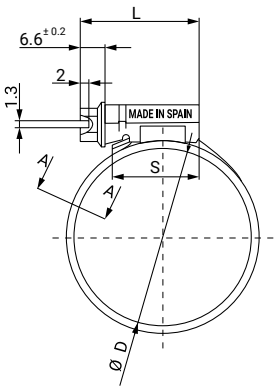

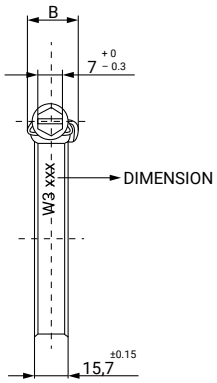

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
90-110	A3016305	29,6	0,8	11	16,7	19,5	12	25	25
100-120	A3016313	29,6	0,8	11	16,7	19,5	10	25	25
110-130	A3016321	29,6	0,8	11	16,7	19,5	8	25	25
120-140	A3016330	29,6	0,8	11	16,7	19,5	7	25	25
130-150	A3016348	31,6	0,8	11	16,7	21,5	6	25	25
140-160	A3016356	31,6	0,8	11	16,7	21,5	5	25	25
150-170	A3016364	31,6	0,8	11	16,7	21,5	4	25	25
160-180	A3016372	31,6	0,8	11	16,7	21,5	3	25	25
170-190	A3016380	31,6	0,8	11	16,7	21,5	2	10	10
180-200	A3016399	31,6	0,8	11	16,7	21,5	1,8	10	10
190-210	A3016428	31,6	0,8	11	16,7	21,5	1,8	10	10
200-220	A3016436	31,6	0,8	11	16,7	21,5	1,8	10	10
210-230	A3016444	31,6	0,8	11	16,7	21,5	1,6	10	10
220-240	A3016452	31,6	0,8	11	16,7	21,5	1,6	10	10