


MIKALOR

W4 ASFA S (12 mm) Hose Clamp with W4 inner-ring (plain finish)





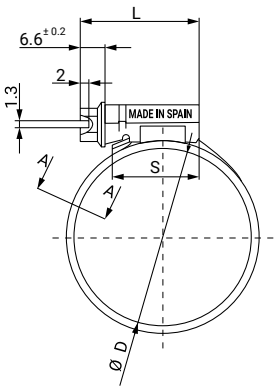

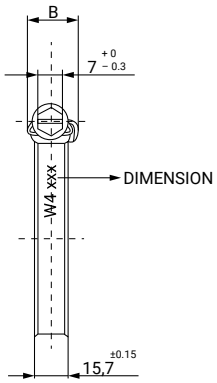

ASFA S hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose.

MATERIAL: W4 Stainless steel X5Cr Ni 18/10 DIN 1.4301 ASI 304
Inner-ring: Stainless steel AISI 301 DIN 1.4310


CORROSION RESISTANCE: 400 hours salt spray (ASTM B-117)


Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	A3014730	29,6	0,8	11	16,7	19,5	45	50	50
20-32	A3014510	29,6	0,8	11	16,7	19,5	45	50	50
25-40	A3014529	29,6	0,8	11	16,7	19,5	40	50	50
30-45	A3014748	29,6	0,8	11	16,7	19,5	35	50	50
32-50	A3014537	29,6	0,8	11	16,7	19,5	35	50	50
40-60	A3014545	29,6	0,8	11	16,7	19,5	30	50	50
50-70	A3014553	29,6	0,8	11	16,7	19,5	25	50	50
60-80	A3014561	29,6	0,8	11	16,7	19,5	20	50	50
70-90	A3014570	29,6	0,8	11	16,7	19,5	17	50	50
80-100	A3014588	29,6	0,8	11	16,7	19,5	14	25	25


MIKALOR

W4 ASFA S (12 mm) Hose Clamp with W4 inner-ring (plain finish)





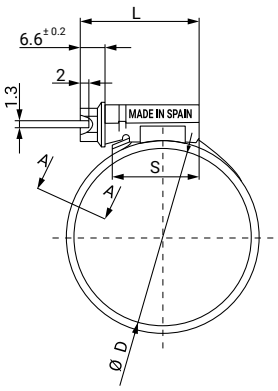

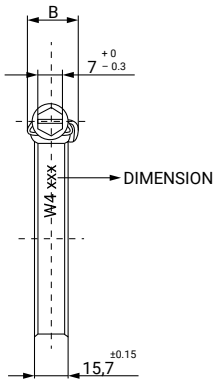

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
90-110	A3014596	29,6	0,8	11	16,7	19,5	12	25	25
100-120	A3014609	29,6	0,8	11	16,7	19,5	10	25	25
110-130	A3014617	29,6	0,8	11	16,7	19,5	8	25	25
120-140	A3014625	29,6	0,8	11	16,7	19,5	7	25	25
130-150	A3014633	31,6	0,8	11	16,7	21,5	6	25	25
140-160	A3014641	31,6	0,8	11	16,7	21,5	5	25	25
150-170	A3014650	31,6	0,8	11	16,7	21,5	4	25	25
160-180	A3014668	31,6	0,8	11	16,7	21,5	3	25	25
170-190	A3014676	31,6	0,8	11	16,7	21,5	2	10	10
180-200	A3014684	31,6	0,8	11	16,7	21,5	1,8	10	10
190-210	A3014692	31,6	0,8	11	16,7	21,5	1,8	10	10
200-220	A3014705	31,6	0,8	11	16,7	21,5	1,8	10	10
210-230	A3014713	31,6	0,8	11	16,7	21,5	1,6	10	10
220-240	A304721	31,6	0,8	11	16,7	21,5	1,6	10	10