

Disposable Air Cleaners



Throw-Away Style

Features

- Disposable “Throw-Away” Plastic Housing
- Over 99% Efficiency
- Wide Range of Low to Medium Dust Concentration Applications
- Low Initial Cost
- Filter Elements Included

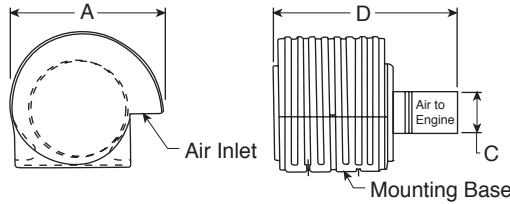


Part Number	Body Dia. in (mm) A	OD in (mm) C	Length in (mm) D	Airflow CFM			Airflow m ³ /min		
				6" H ₂ O	8" H ₂ O	10" H ₂ O	1.5 kPa	2.0 kPa	2.5 kPa
AH1100	17.4 (442)	5.5 (140)	14.6 (370)	700	820	920	19.8	23.2	26.0
AH1101	19.8 (503)	5.5 (140)	17.8 (453)	798	920	1040	22.6	26.0	29.4

ECB Style

Replaces Donaldson® ECB Duralite™ Style Disposable Housings and Filters

Applications

- Light and Medium Duty Engines
- Gas and Diesel Powered Vehicles and Equipment

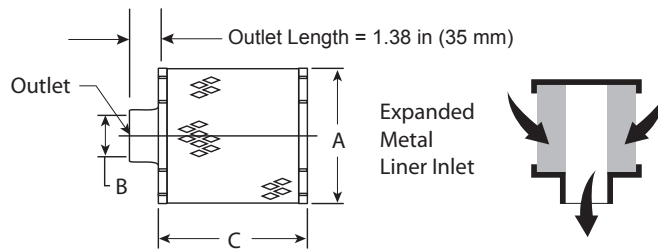

Part Number	Body Dia. in (mm) A	Outlet ID in (mm) B	Length in (mm) C	Airflow CFM			Airflow m ³ /min			Media Type*
				4" H ₂ O	6" H ₂ O	8" H ₂ O	1 kPa	1.5 kPa	2 kPa	
AH1136	8.5 (215.9)	3 (76.2)	11 (279.4)	275	335	390	7.79	9.49	11.04	A
AH1141	8.5 (215.9)	4 (101.6)	11 (279.4)	280	400	470	7.93	11.33	13.30	A
AH1185	8.5 (215.9)	3 (76.2)	3 (76.2)	83	124	150	2.36	3.52	4.24	A
AH1188	8.5 (215.9)	3 (76.2)	8.5 (215.9)	176	256	300	4.90	7.25	8.50	A
AH19002	8.5 (215.9)	4 (101.6)	11 (279.4)	280	400	470	7.93	11.33	13.30	B
AH19003	8.5 (215.9)	3 (76.2)	11 (279.4)	275	335	390	7.20	9.16	11.89	B
AH19004	10.5 (266.7)	4 (101.6)	10.5 (266.7)	380	440	480	10.76	12.46	13.59	B
AH19037	10.5 (266.7)	4 (101.6)	10.5 (266.7)	450	590	680	12.74	16.70	19.25	A
AH19042	12.5 (317.5)	6 (152.4)	15 (381.0)	500	650	800	14.15	18.40	22.65	C


* A = Standard
 B = Treated for higher humidity (marine applications, for example)
 C = Reinforced to withstand higher pulsation applications

ECC Style

Replaces Donaldson® ECC Duralite™ Style Disposable Housings and Filters

Applications

- Light and Medium Duty Engines
- Gas and Diesel Powered Vehicles and Equipment

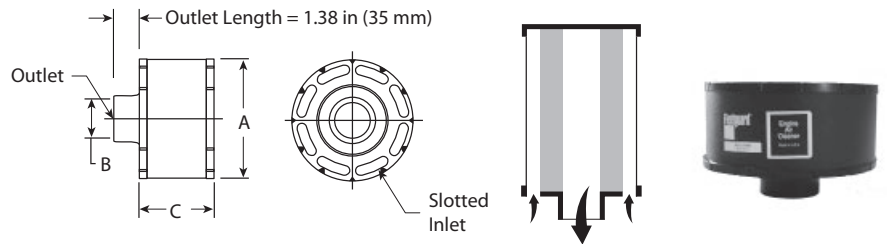

Part Number	Body Dia. in (mm) A	OD in (mm) B	Length in (mm) C	Airflow CFM			Airflow m³/min			Media Type
				4" H ₂ O	6" H ₂ O	8" H ₂ O	1 kPa	1.5 kPa	2 kPa	
AH1107	8.5 (215.9)	3 (76.2)	9.5 (241.35)	170	205	245	4.81	5.80	6.94	C
AH1138	8.5 (215.9)	3 (76.2)	5 (127.0)	150	180	215	4.25	5.10	6.09	C
AH1140	10.5 (266.7)	4 (101.6)	6 (152.4)	325	400	480	9.20	11.32	13.59	A
AH1190	8.5 (215.9)	2.5 (63.5)	6.5 (165.1)	130	165	188	3.68	4.67	5.32	C
AH1196	10.5 (266.7)	4 (101.6)	10.5 (266.7)	400	500	620	11.33	14.16	17.56	A
AH1198	8.5 (215.9)	2.5 (63.5)	4 (101.6)	112	145	170	3.17	4.11	4.81	C
AH1199	8.5 (215.9)	2.5 (63.5)	9.5 (241.3)	135	170	195	3.82	4.81	5.52	C
AH19000	5.5 (139.7)	1.75 (44.45)	4 (101.6)	64	82	94	1.81	2.32	2.66	C
AH19001	4.5 (114.3)	1.5 (38.1)	4.5 (114.3)	42	55	64	1.19	1.56	1.81	C
AH19220	12.5 (317.5)	5 (127.0)	11 (279.4)	485	620	760	13.73	17.55	21.52	A
AH19232	6.5 (165.1)	2 (50.8)	7.5 (190.5)	108	137	162	3.05	3.87	4.58	C


- * A = Standard
- B = Treated for higher humidity (marine applications, for example)
- C = Reinforced to withstand higher pulsation applications

ECD Style

Replaces Donaldson ECD Duralite Style Disposable Housings and Filters

Applications

- Light and Medium Duty Engines
- Gas and Diesel Powered Vehicles and Equipment

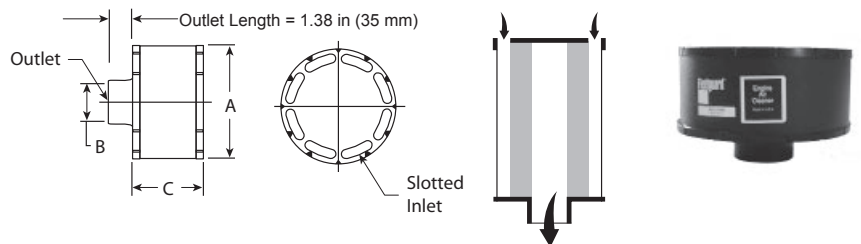

Part Number	Body Dia. in (mm) A	OD in (mm) B	Length in (mm) C	Airflow CFM			Airflow m³/min		
				4" H ₂ O	6" H ₂ O	8" H ₂ O	1.0 kPa	1.5 kPa	2.0 kPa
AH19228	4.5 (114.3)	1.5 (38.1)	4.5 (114.3)	44	56	65	1.24	1.58	1.84

ECO II Single-Stage Air Cleaner for Medium-Duty Service

Its unique, tapered, offset, and oversized element in a highly efficient, compact design makes the ECO II today's leading choice for many stationary engine applications. The revolutionary design results in greatly reduced intake air restriction, and provides maximum airflow to the engine.

Features

- 99.9% Efficiency



Component	Diameter in (mm)	Length in (mm)	Normal Rated Airflow CFM 8 in H ₂ O	Normal Rated Airflow m ³ /min 8 in H ₂ O	Intake Dia in (mm)	Outlet Dia in (mm)	Part Number
ECO II Air Cleaner	9.75 (248)	24 (610)	1100	–	Grid	6 (152)	AH1194
	11.0 (279)	24 (610)	1380	–	Grid	7 (178)	AH1103F/ AH1103
	13.5 (343)	15 (381)	1600	–	Grid	7 (178)	AH1195
	13.5 (343)	18 (457)	1600	–	Grid	7 (178)	AH1183
	13.5 (343)	24 (610)	1600	–	Grid	7 (178)	AH1135
Optional Inlet Adapter	9.75 (248)	–	–	–	6 (152)	–	3836943 S
	11.0 (279)	–	–	–	6 (152)	–	3836944 S
	11.0 (279)	–	–	–	7 (178)	–	3836945 S
	13.5 (343)	–	–	–	7 (178)	–	3836946 S
Combination Water Separator and Inlet Adapter	9.75 (248)	–	–	–	6 (152)	–	3836947 S
	11.0 (279)	–	–	–	6 (152)	–	3836948 S
	11.0 (279)	–	–	–	7 (178)	–	3836949 S
	13.5 (343)	–	–	–	7 (178)	–	3836950 S
Hose Clamps (2 Required)	9.75 (248)	–	–	–	–	–	3836951 S
	11.0 (279)	–	–	–	–	–	3836952 S
	13.5 (343)	–	–	–	–	–	3836953 S
Pressure Tap Sleeve (with Service Indicator) 1/8" NPT Tap	–	–	–	–	6 (152)	6 (152)	3836954 S
Pressure Tap Sleeve (with Service Indicator) 1/8" NPT and 3/4" NPT Taps	–	–	–	–	6 (152)	6 (152)	3836955 S
Pressure Tap Sleeve (with Service Indicator) 1/8" NPT Tap	–	–	–	–	7 (178)	7 (178)	3836956 S
Pressure Tap Sleeve (with Service Indicator) 1/8" NPT and 3/4" NPT Taps	–	–	–	–	7 (178)	7 (178)	3836957 S

ECO-SE For Light and Medium Duty Applications

The ECO-SE is perfect for today's smaller fleet and stationary engines up to 250 hp. Its compact size, light weight, ease of service, and high efficiency combine to provide the critical engine protection and simplified maintenance cost-conscious equipment operators now require.

Features

- Integral neoprene outlet for easy installation and service
- 99.9% efficiency



Component	Body Dia. in (mm) A	Outlet ID in (mm) B	Length in (mm) C	Side Inlet OD in (mm)	Airflow Range CFM	Airflow Range m3/min	Part Number
ECO-SE Air Cleaner	6.8 (173)	3.0 (76)	14.2 (361)	-	240 - 340	6.8 - 9.6	AH1191
	7.8 (198)	4.0 (102)	17.2 (437)	-	355 - 510	10.1 - 14.4	AH1192
	9.7 (246)	5.0 (127)	18.9 (480)	-	610 - 890	17.3 - 25.2	AH1193
	9.7 (246)	5.5 (140)	19.4 (493)	6.0 (152)	600 - 900	17.0 - 25.5	AH1197
	7.8 (198)	4.5 (114)	17.2 (437)	6.0 (152)	420 - 800	11.9 - 22.7	AH19057

Component	Diameter in (mm)	Part Number
Mounting Clamps (2 Required)	6.9 (175)	3836931 S
	7.9 (201)	3836932 S
	9.8 (249)	3836933 S