
PU 400 E ECO

Applications extraction systems, dust extraction, wood dust extraction, textile fiber extraction, air extraction

Structure Polyester-Polyurethane, uncolored, transparent, steel wire / spring steel wire / not coated / copper plated

Temperature -40°C up to 90°C, short term up to 125°C

Properties light weight, very good flexibility, good abrasion resistance, good tensile strength, ultimate elongation, good ozone- & UV-resistance

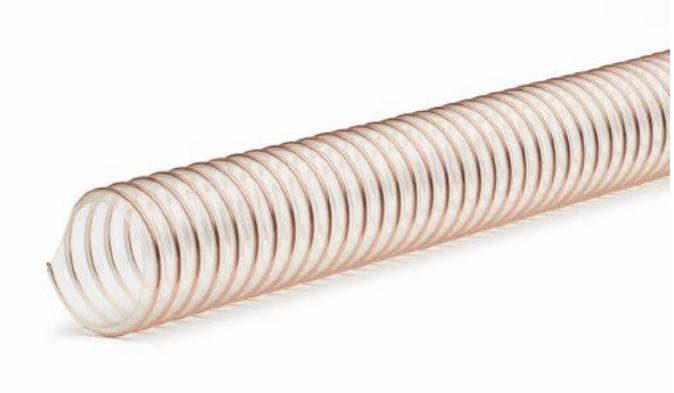

Technical data

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)
32	36,00	0,40	36	0,60	0,30	0,14500
35	39,00	0,40	39	0,60	0,30	0,15300
38	42,00	0,40	42	0,60	0,30	0,17200
40	44,00	0,40	44	0,60	0,30	0,17800
42	46,00	0,40	46	0,60	0,30	0,16100
45	49,00	0,40	49	0,60	0,30	0,19900
48	52,00	0,40	52	0,60	0,30	0,18300
50	54,00	0,40	54	0,60	0,30	0,22000
51	55,00	0,40	51	0,40	0,20	0,22400
55	59,00	0,40	55	0,40	0,20	0,24100
60	64,00	0,40	60	0,40	0,20	0,26300
65	69,00	0,40	65	0,40	0,20	0,28400
70	74,00	0,40	70	0,40	0,20	0,31200
75	79,00	0,40	75	0,40	0,20	0,32300
76	80,00	0,40	76	0,40	0,20	0,33800
80	84,00	0,40	80	0,30	0,15	0,35500
83	87,00	0,40	83	0,30	0,15	0,36900
90	94,00	0,40	90	0,30	0,15	0,40000
100	105,00	0,40	100	0,30	0,15	0,46200
102	107,00	0,40	102	0,20	0,10	0,47100
110	115,00	0,40	110	0,20	0,10	0,50500
120	125,00	0,40	120	0,20	0,10	0,53400

Original technical data by OCONO - VACUFLEX

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy