
PU 600 IND ECO

Applications extraction systems, dust extraction, extractions arms, air extraction, textile fiber extraction

Structure Polyester-Polyurethane, uncolored, transparent, steel wire / spring steel wire / not coated / copper plated

Temperature -40°C up to 90°C, short term up to 125°C

Properties very good flexibility, very good abrasion resistance, good tensile strength, ultimate elongation, good ozone- & UV-resistance

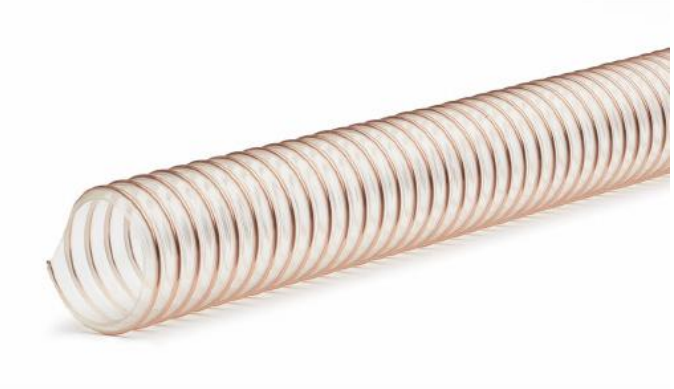

Technical data

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)
32	36,00	0,60	32	0,70	0,35	0,21400
35	39,00	0,60	35	0,70	0,35	0,17900
38	42,00	0,60	38	0,70	0,35	0,19300
40	45,00	0,60	40	0,70	0,35	0,22800
42	47,00	0,60	42	0,70	0,35	0,23900
45	50,00	0,60	45	0,70	0,35	0,25500
48	53,00	0,60	48	0,70	0,35	0,27100
50	55,00	0,60	50	0,70	0,35	0,28200
51	56,00	0,60	51	0,60	0,25	0,28800
55	60,00	0,60	55	0,60	0,25	0,31000
60	65,00	0,60	60	0,60	0,25	0,38500
65	70,00	0,60	65	0,60	0,25	0,41800
70	75,00	0,60	70	0,60	0,25	0,44000
75	80,00	0,60	75	0,60	0,25	0,47100
76	81,00	0,60	76	0,60	0,25	0,49100
80	85,00	0,60	80	0,40	0,15	0,49200
83	88,00	0,60	83	0,40	0,15	0,51000
90	95,00	0,60	90	0,40	0,15	0,55300
100	106,00	0,60	100	0,40	0,15	0,63800
102	108,00	0,60	102	0,30	0,10	0,65100
110	116,00	0,60	110	0,30	0,10	0,62400
120	126,00	0,60	120	0,30	0,10	0,68000

Original technical data by OCONO - VACUFLEX

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy

Technical data - continued

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)
125	131,00	0,60	125	0,30	0,10	0,80100
127	133,00	0,60	127	0,30	0,10	0,81400
130	136,00	0,60	130	0,30	0,10	0,83300
140	146,00	0,60	140	0,30	0,10	0,79200
150	156,00	0,60	150	0,30	0,10	0,84800
152	158,00	0,60	152	0,30	0,10	0,85900
160	166,00	0,60	160	0,20	0,05	0,90300
175	181,00	0,60	175	0,20	0,05	0,98700
180	186,00	0,60	180	0,20	0,05	1,01500
200	207,00	0,60	200	0,20	0,05	1,17000
203	210,00	0,60	203	0,20	0,05	1,18800
225	232,00	0,60	225	0,20	0,05	1,31500
250	257,00	0,60	250	0,10	0,02	1,45900
254	261,00	0,60	254	0,10	0,02	1,48200
280	287,00	0,60	280	0,10	0,02	1,74300
300	307,00	0,60	300	0,10	0,02	1,85600
305	312,00	0,60	305	0,10	0,02	1,88700
350	357,00	0,60	350	0,10	0,02	2,16600
400	407,00	0,60	400	0,10	0,02	2,47500

Original technical data by OCONO - VACUFLEX