MIKALOR



W1


Spring clip W1

Spring clips are designed to distribute pressure uniformly around the application zone, thanks to the material used in their manufacture.


Their use is recommended when the hose is subject to rapid changes in temperature which can cause expansion and contraction of the materials used in the assembly.

These clips are quick and easy to assemble and can even be mounted manually in some cases, without the need for tools.

Ø Application mm	Part Number	Ø di ±0.2	b +1 -0.2	a ±0.5	S	Box Quantity	Outer Box Quantity
6,0	02014025	5,5	7	3,0	0,5	500	8.000
7,0	02014033	6,4	7	3,0	0,5	500	8.000
8,0	02014041	7,4	8	3,0	0,6	500	8.000
9,0	02014050	8,4	8	3,5	0,6	500	4.000
10,0	02014068	9,3	8	3,5	0,7	500	4.000
11,0	02014076	10,3	8	4,0	0,7	500	4.000
12,0	02014084	11,1	8	4,0	0,7	500	4.000
14,0	02014092	12,9	8	4,0	0,8	500	4.000
15,0	02014105	13,5	8	5,2	0,8	500	4.000
17,0	02014113	15,3	8	5,0	0,8	500	4.000
20,0	02014121	18,0 ±0.4	8	4,2	0,8	500	4.000



TECHNICAL INFORMATION	
MATERIAL	Steel C67S W1
FINISH	Zinc plated Cr3
CORROSION RESISTANCE	144 hours salt spray (ASTM B-117)

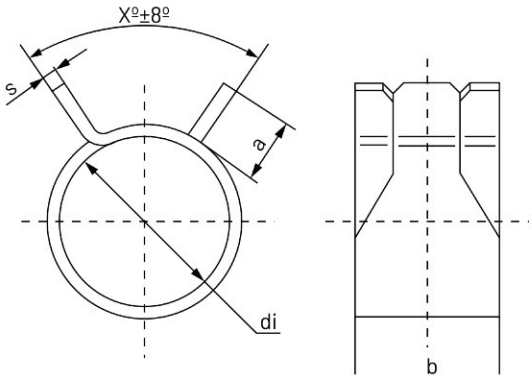

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy