
TPR 600

Applications automotive engineering, vehicle construction, ventilation, air conditioning & HVAC, air supply

Structure TPR, black, opaque, steel wire / spring steel wire / not coated / copper plated

Temperature -40°C up to 135°C, short term up to 150°C

Properties light weight, very good flexibility, good temperature resistance, free of halogen & softeners, phthalate-free

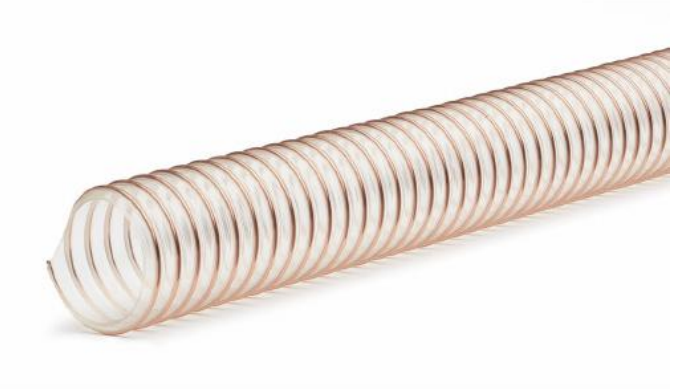

Technical data

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)
25	29,00	0,60	25	0,70	0,35	0,12900
32	36,00	0,60	32	0,70	0,35	0,16500
35	39,00	0,60	35	0,70	0,35	0,17900
38	42,00	0,60	38	0,70	0,35	0,19500
40	45,00	0,60	40	0,70	0,35	0,20500
42	47,00	0,60	42	0,70	0,35	0,21500
45	50,00	0,60	45	0,70	0,35	0,23100
48	53,00	0,60	48	0,70	0,35	0,26000
50	55,00	0,60	50	0,70	0,35	0,25600
51	56,00	0,60	51	0,60	0,25	0,26100
55	60,00	0,60	55	0,60	0,25	0,29000
60	65,00	0,60	60	0,60	0,25	0,29500
63	67,00	0,60	63	0,60	0,25	0,31000
65	70,00	0,60	65	0,60	0,25	0,36400
70	75,00	0,60	70	0,60	0,25	0,29500
75	80,00	0,60	75	0,60	0,25	0,36800
76	81,00	0,60	76	0,60	0,25	0,37300
80	85,00	0,60	80	0,40	0,15	0,42900
83	88,00	0,60	83	0,40	0,15	0,44500
90	95,00	0,60	90	0,40	0,15	0,44100
100	106,00	0,60	100	0,40	0,15	0,50200
102	108,00	0,60	102	0,30	0,10	0,51200

Original technical data by OCONO - VACUFLEX

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy

Technical data - continued

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)
110	116,00	0,60	110	0,30	0,10	0,55200
120	126,00	0,60	120	0,30	0,10	0,60300
125	131,00	0,60	125	0,30	0,10	0,62800
127	133,00	0,60	127	0,30	0,10	0,72000
130	136,00	0,60	130	0,30	0,10	0,65300
140	146,00	0,60	140	0,30	0,10	0,70300
150	156,00	0,60	150	0,30	0,10	0,74600
152	158,00	0,60	152	0,30	0,10	0,75600
160	166,00	0,60	160	0,20	0,05	0,79600
175	181,00	0,60	175	0,20	0,05	0,98700
180	186,00	0,60	180	0,20	0,05	0,90400
200	207,00	0,60	200	0,20	0,05	1,41800
203	210,00	0,60	203	0,20	0,05	1,43900
225	232,00	0,60	225	0,20	0,05	1,31500
250	257,00	0,60	250	0,10	0,02	1,76800
280	287,00	0,60	280	0,10	0,02	1,63200
300	307,00	0,60	300	0,10	0,02	2,28200
350	357,00	0,60	350	0,10	0,02	2,66000

Original technical data by OCONO - VACUFLEX