


1. The turbo® III Precleaner has specially designed blades that cause the incoming air to spin.

2. As air spins, centrifugal force spins dust, dirt, insects, rain and snow from clean air.

3. Contaminants are blown out special discharge ports by a high-velocity air powered rotor.

4. Only the purified air goes to the air filter

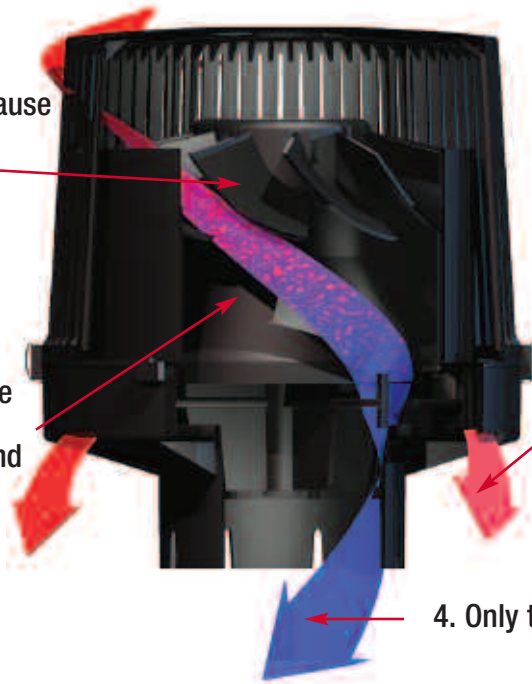

turbo® III Precleaner models and sizes

Model #	Inlet Size Base		Airflow Low Range	
	Inches	mm	CFM	m ³ /min
15	2"	51	15-85	0.4-2.1
50	3" or 4"	76 or 102	50-250	1.4-7.1
200	4.5" or 5"	114 or 127	200-500	5.6-14.2
500	6," 7," 8"	152, 178, 203	500-1100	14.2-31.1

All turbo® III models are available with a raincap, and are made from high-strength Polymer, 25% glass filled.

turbo®
PRECLEANER

4540 W. 160th St.
Cleveland, Ohio, USA 44135
Phone: 216.362.0755
Fax: 216.362.0799
www.turboprecleaner.com
sales@turboprecleaner.com

DISTRIBUTED BY:

BORSERINI SRL

Via N. Sauro, 1
I-23100 Sondrio SO
Phone: +39 0342 209200 Fax: +39 0342 210690
e-mail:sales@borserini.it Web: www.borserini.it