

DRIVE TECHNOLOGY

INDIVIDUAL PRODUCT SOLUTION

Please contact us for your individual brake.



Precision as passion
Certification according to DIN EN ISO 9001 and 14001



PRECIMA partner (EMEA - USA)
<https://www.borserini.com>

PRECIMA Magnettechnik GmbH
Röcker Str. 16
D-31675 Bückeburg
Tel.: +49 (0) 5722-89332-0
Fax.: +49 (0) 5722-89332-2
E-Mail: info@precima.de
www.precima.de

2024 - v1.01




 **PRECIMA**

EN



FDB
Spring-applied brake

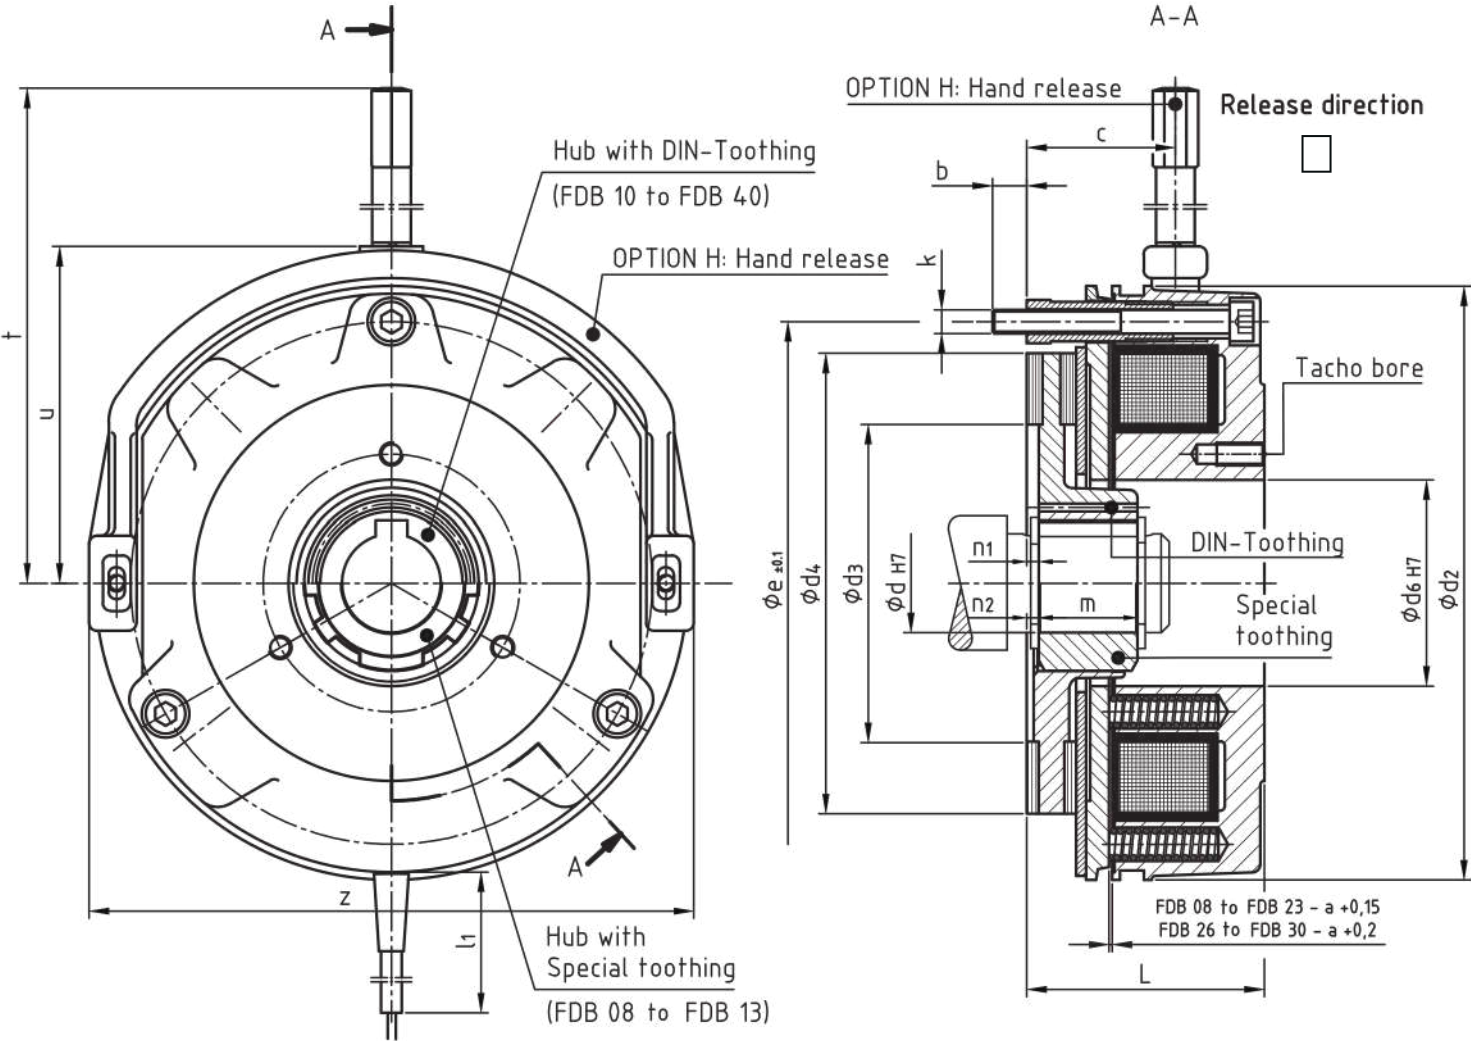

- Reliable and robust working or holding brake
- Ideal for modular systems
- Available in version C (adjustable braking torque)($\varnothing$ N (fixed braking torque with or without speedometer holes)
- Protection class IP 54 when mounted under an engine fan cover
- Ambient temperature -20°C up to +40°C
- Noise reduced
- Handrelease (optionally lockable)
- Friction plate
- Mounting flange
- Dust protection ring
- Microswitch (function- or wearcontrol)
- Inductive sensor (function control)
- Temperature sensor
- Anti-condensation heater
- Protection class IP 55 when mounted under an engine fan cover
- Threaded holes for encoder attachment (tachoboires)
- Customized versions on request

Size	Nominal braking torque Mb N[Nm]	P[W] @ 20°C	a	b	c	$\varnothing d$ H7	$\varnothing d2$	$\varnothing d3$	$\varnothing d4$	$\varnothing d6$	$e \pm 0,1$	L	Π	k	m	n1	n2	t	u	z
08	2-7,5	22	0,2	6	20	11/12/15	85	42,1	59,8	26	72	38,3	400 bis 1000	3xM4	18	1,5	0,5	100	55	89
10	4-15	28	0,2	7	21	11/12/15	105	50	78	32	90	47,7		3xM5	20	2,5	1	110	65	111
13	8-30	34	0,3	9	33	15/20	130	62	95,5	42	112	53,1		3xM6	20	3,5	1,5	135	75	132
15	17-60	42	0,3	9	38	20/25	150	80	117	52	132	60,3		3xM6	25	3	-	140	85	151
17	26-90	50	0,3	11	42	25/30/35*	170	82	126	62	145	69,8		3xM8	30	3	-	165	97	172
20	42-150	76	0,4	11	48	30/35/40	195	94	152	72	170	80,4		3xM8	30	3	-	186	116	196
23	65-225	76	0,4	11	53	35/40/45	225	120	178	80	196	89,8		3xM8	35	4	-	204	128	224
26	125-375	325	0,5	11	58	40/45/50/50*	258	130	204	90	230	98,9		3xM10	40	4	-	285	148	258
30	200-600	140	0,5	12,5	60	50/60/65	306	179	253	115	278	104,5		6xM10	50	4	-	310	175	304
40	800-1500	144	0,6	18	69	65/70/75/80	400	256	327	150	360	120,6		6xM12	70	4	-	415	230	403

Changes and errors expected
Dimensions in mm, standard keyway according to DIN 6885 / 1-JS9
* Keyway according to DIN 6885 Bl.3



PRECIMA partner: <https://www.borserini.com>



EMEA - BORSERINI S.R.L.
Via N. Sauro 1 - 23100 (SO) - Italy
E-Mail: precima@borserini.it
Tel: +39 0342 209200

USA - BORSERINI Industrial Trading LLC
301 McCullough Dr. Suite 433 Charlotte NC 28262
E-Mail: BIT-Precima@borserini.com
Tel: +1 704 547 328

