


K1Z-MSC-PU

钢丝加强型软管

Hoses – with steel wire reinforcement

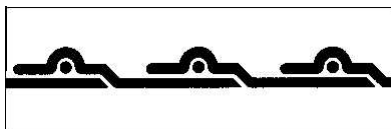

结构: 管壁材料: 抗微生物抗水解的聚氨酯 (螺旋之间的管壁厚度为 0.8mm), 硬度为邵氏 85A; 镀铜弹性钢丝螺旋加强嵌入管壁中。

特性: 中等质量的软管, 弯曲灵活, 内壁平滑, 具有高拉伸、耐磨强度和断裂延伸率。无柔软剂, 无卤, 无害, 无镉。

应用范围: 木工行业的通用管, 塑料和化学行业的固体输送管。

温度范围: -40°C 至 +90°C
(短时间内可达 +125°C)

备索: 备有阻燃管供选用。

Structure: Wall made of microbe and hydrolysis resistant Polyurethane (wall thickness between the spirals ca. 0.8mm), Shore A ~85, copper plated spring steel spiral embedded into wall.

Characteristics: Flexible and medium heavy hose with smooth interior and high tensile and abrasion strengths and ultimate elongation. Free of softeners, halogen free, physiological safe, cadmium free.

Applications: Universal hose for the woodworking, plastic and chemical industry for transportation of solids.

Temperature range: -40°C to +90°C
(+125°C short term)

Specialties: also in flame retardant available

内径 Ø = d		外径 Ø = D		弯曲半径 (最小值) r (min.)	重量 Weight	负荷能力		长度 Length	产品代码 Part-No.
I.D. Ø = d		O.D. = D				= Load Capacity			
毫米 mm	公差 Tolerance	毫米 mm	公差 Tolerance	毫米 mm	克/米 ca. g/m	负压 Vacuum 毫巴 mbar	压力 Pressure 巴 bar	米 m	
32	+1,5 / -0	38	+2 / -0	r = D	250	550	2,3	10m	6-2000-032-00
35		41			273				6-2000-035-00
38		44			295				6-2000-038-00
40		46			310				6-2000-040-00
42		48			325				6-2000-042-00
45		51			347				6-2000-045-00
48		54			369				6-2000-048-00
50		56			384				6-2000-050-00
51		57			392	420	2,0		6-2000-051-00
55		61			421				6-2000-055-00
60	+2 / -0	66	+3 / -0		459				6-2000-060-00
65		71			496				6-2000-065-00
70		76			518				6-2000-070-00
75		81			555				6-2000-075-00
76		82			562				6-2000-076-00
80		86			591	350	1,5		6-2000-080-00
83	+3 / -0	89	+4 / -0		613				6-2000-083-00
90		96			663				6-2000-090-00
100		107			868				6-2000-100-00
102		109			885	300	1,0		6-2000-102-00
110		117			954				6-2000-110-00
120		127			1039				6-2000-120-00
125	+3 / -0	132	+4 / -0		1082				6-2000-125-00
127		134			1099				6-2000-127-00
130		137			1124				6-2000-130-00
140		147			1210				6-2000-140-00
150		157			1295				6-2000-150-00
152		159			1312				6-2000-152-00
160	+4 / -0	167	+6 / -0		1380	250	0,7		6-2000-160-00
175		182			1508				6-2000-175-00
180		187			1551				6-2000-180-00
200		207			1747				6-2000-200-00
203		210			2146				6-2000-203-00
225		232			2353				6-2000-225-00
250	+ 6 / -0	257	+9 / -0		2612	150	0,5		6-2000-250-00
280		287			2923				6-2000-280-00
300		307			3130				6-2000-300-00
350		357			3648				6-2000-350-00

如需其他内径和管壁颜色, 欢迎来电垂询

表中负压和压力值会随安装和工作条件而改变。如有疑问, 请将应用告知我们, 我们非常高兴提供建议给您。如需其他规格软管 (如: 其他的内径、管壁颜色和公差), 欢迎来电垂询。

注: 以上数据基于常温 20°C。

Stand: 12/2003

Other diameters and colours on request

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C).

VACUFLEX GmbH, Hessenring 8-12, D-64546 Mörfelden, Germany
Tel. +49(0)6105-9339-0 Fax: +49(0)6105-9339-60

e-mail: info@vacuflex.de
Internet: www.vacuflex.de



A SCHAUBURG HOSE TECHNOLOGY COMPANY