
MIKALOR

W4 ASFA-L (9 mm) Hose Clamp with Pre-Assembly Clip



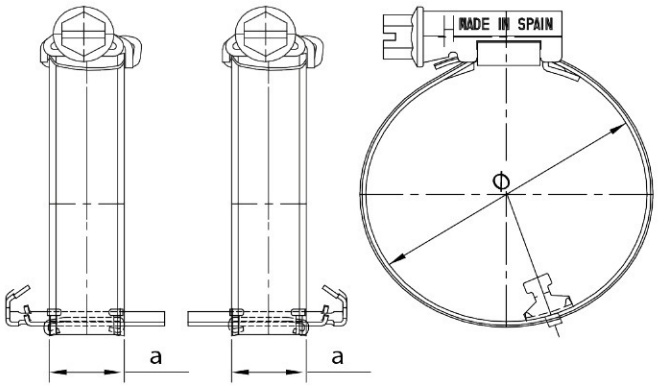

With the aim of saving time and increasing productivity on the assembly line, Mikalor has developed the only clamp of its kind capable of guaranteeing the same tightening torque values and the same performance as a standard clamp.

Thanks to its exclusive design, the pre-assembly clip can be fitted to the clamp and later attached to the hose without any loss of functionality, tightening torque or reduction in performance. Another new feature of our pre- positioning system is that the clip can also be fixed to the hose using adhesive. This is the only pre-assembly system which guarantees that the hose is not damaged when the clamp is tightened.

MATERIAL:	W4 - Steel AISI 304
FINISH:	Stainless steel
CORROSION RESISTANCE:	400 hours salt spray (ASTM B-117)

* Special dimensions and positioning of the clip according to customer requirements are available on request.

* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling

a	Ø Application mm	Part Number		Par (Bar)	Box Quantity
		Right	Left		
9	16-27	03048001	03049001	40	50
9	20-32	03048002	03049002	36	50
9	25-40	03048003	03049003	32	50
9	30-45	03048004	03049004	28	50
9	32-50	03048005	03049005	24	50
9	40-60	03048006	03049006	19	25
9	45-65	03048007	03049007	17	25
9	50-70	03048008	03049008	17	25
9	55-75	03048009	03049009	17	25
9	60-80	03048010	03049010	15	25
9	65-85	03048011	03049011	13	25
9	70-90	03048012	03049012	13	25
9	75-95	03048013	03049013	11	25
9	80-100	03048014	03049014	11	25