
MIKALOR

W4 ASFA-S (12 mm) Hose Clamp with Pre-Assembly Clip



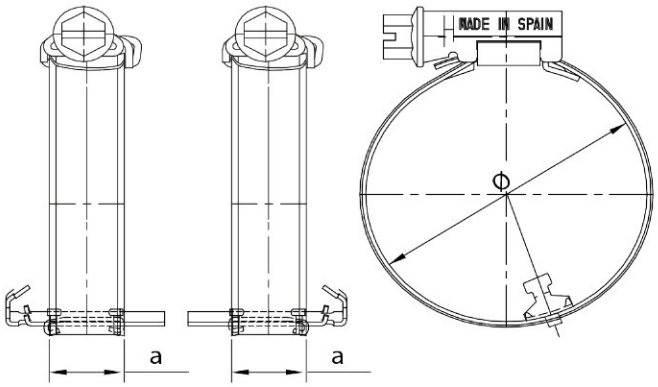

With the aim of saving time and increasing productivity on the assembly line, Mikalor has developed the only clamp of its kind capable of guaranteeing the same tightening torque values and the same performance as a standard clamp.

Thanks to its exclusive design, the pre-assembly clip can be fitted to the clamp and later attached to the hose without any loss of functionality, tightening torque or reduction in performance. Another new feature of our pre- positioning system is that the clip can also be fixed to the hose using adhesive. This is the only pre-assembly system which guarantees that the hose is not damaged when the clamp is tightened.

MATERIAL:	W4 - Steel AISI 304
FINISH:	Stainless steel
CORROSION RESISTANCE:	400 hours salt spray (ASTM B-117)

* Special dimensions and positioning of the clip according to customer requirements are available on request.

* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling

a	Ø Application mm	Part Number		Par (Bar)	Box Quantity
		Right	Left		
12	16-27	03053001	03054001	40	50
12	20-32	03053002	03054002	36	50
12	25-40	03053003	03054003	32	50
12	30-45	03053004	03054004	28	50
12	32-50	03053005	03054005	24	50
12	40-60	03053006	03054006	19	50
12	45-65	03053007	03054007	17	50
12	50-70	03053008	03054008	17	50
12	55-75	03053009	03054009	17	50
12	60-80	03053010	03054010	15	50
12	65-85	03053011	03054011	13	50
12	70-90	03053012	03054012	13	50
12	75-95	03053013	03054013	11	50
12	80-100	03053014	03054014	11	25