


MIKALOR

W3 ASFA L (9 mm) Hose Clamp with W4 inner-ring (plain finish)





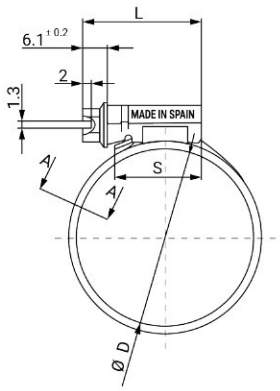

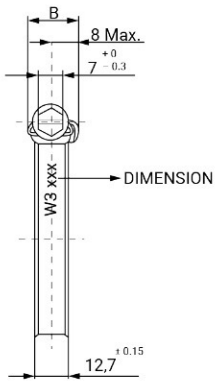

ASFA L hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose.

MATERIAL: W3 Stainless steel X6Cr17 DIN 1.4016 AISI 430
Bolt: Stainless stee AISI 304 Cu
Inner-ring: Stainless steel AISI 301 DIN 1.4310

CORROSION RESISTANCE: 200 hours salt spray (ASTM B-117)

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	A3016030	23,6	0,75	10,5	14	16,5	42	200	200
20-32	A3016049	23,6	0,75	10,5	14	16,5	36	200	200
25-40	A3016065	25,6	0,75	10,5	14	17,1	32	100	100
30-45	A3016073	25,6	0,75	10,5	14	17,1	28	100	100
32-50	A3016081	25,6	0,75	10,5	14	17,1	24	100	100
40-60	A3016090	25,6	0,75	10,5	14	17,1	19	100	100
50-70	A3016102	29,6	0,75	10,5	14	21,1	17	100	100
60-80	A3016110	29,6	0,75	10,5	14	21,1	15	100	100
70-90	A3016129	29,6	0,75	10,5	14	21,1	13	50	50
80-100	A3016137	29,6	0,75	10,5	14	21,1	11	50	50
90-110	A3016145	29,6	0,75	10,5	14	21,1	11	25	25
100-120	A3016153	29,6	0,75	10,5	14	21,1	11	25	25
110-130	A3016161	29,6	0,75	10,5	14	21,1	11	25	25
120-140	A3016170	29,6	0,75	10,5	14	21,1	11	25	25
130-150	A3016188	29,6	0,75	10,5	14	21,1	11	25	25
140-160	A3016196	29,6	0,75	10,5	14	21,1	11	25	25