


MIKALOR

W4 ASFA L (9 mm) Hose Clamp with W4 inner-ring (plain finish)





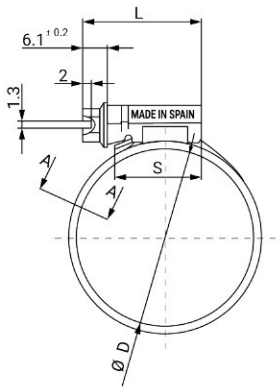

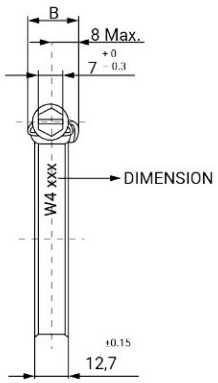

ASFA L hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose.

MATERIAL: W4 Stainless steel X5Cr Ni 18/10 DIN 1.4301 ASI 304 Inner-ring: Stainless steel AISI 301 DIN 1.4310

CORROSION RESISTANCE: 400 hours salt spray (ASTM B-117)

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	A3014035	23,6	0,75	10,5	14	16,5	42	200	200
20-32	A3014043	23,6	0,75	10,5	14	16,5	36	200	200
25-40	A3014051	25,6	0,75	10,5	14	17,1	32	100	100
30-45	A3014060	25,6	0,75	10,5	14	17,1	28	100	100
32-50	A3014078	25,6	0,75	10,5	14	17,1	24	100	100
40-60	A3014086	25,6	0,75	10,5	14	17,1	19	100	100
50-70	A3014094	29,6	0,75	10,5	14	21,1	17	100	100
60-80	A3014107	29,6	0,75	10,5	14	21,1	15	100	100
70-90	A3014115	29,6	0,75	10,5	14	21,1	13	50	50
80-100	A3014123	29,6	0,75	10,5	14	21,1	11	50	50
90-110	A3014140	29,6	0,75	10,5	14	21,1	11	25	25
100-120	A3014158	29,6	0,75	10,5	14	21,1	11	25	25
110-130	A3014166	29,6	0,75	10,5	14	21,1	11	25	25
120-140	A3014174	29,6	0,75	10,5	14	21,1	11	25	25
130-150	A3014182	29,6	0,75	10,5	14	21,1	11	25	25
140-160	A3014190	29,6	0,75	10,5	14	21,1	11	25	25