


MIKALOR

W3 ASFA L (9 mm) Hose Clamp with W4 inner-ring (black finish)





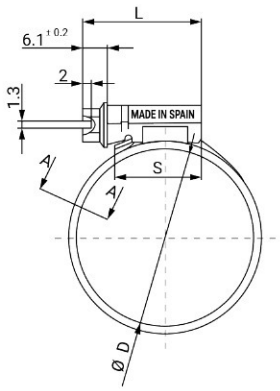

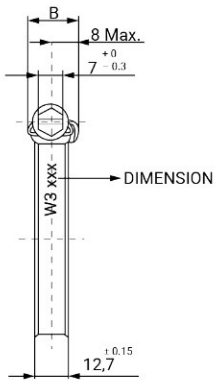

ASFA L hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose. The black finish is ideal for applications where the clamp is required to blend in with the rest of the assembly.

MATERIAL:	W3 Stainless steel X6Cr17 DIN 1.4016 AISI 430 Bolt: Stainless steel ASI 304 Cu Inner-ring: Stainless steel DIN 1.4310 AISI 301
FINISH:	Clamp: Black Delta Seal Inner-ring: Black tefloned
CORROSION RESISTANCE:	200 hours salt spray (ASTM B-117)

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	AT016030	23,6	0,75	10,5	14	16,5	42	200	200
20-32	AT016049	23,6	0,75	10,5	14	16,5	36	200	200
25-40	AT016065	25,6	0,75	10,5	14	17,1	32	100	100
30-45	AT016073	25,6	0,75	10,5	14	17,1	28	100	100
32-50	AT016081	25,6	0,75	10,5	14	17,1	24	100	100
40-60	AT016090	25,6	0,75	10,5	14	17,1	19	100	100
50-70	AT016102	29,6	0,75	10,5	14	21,1	17	100	100
60-80	AT016110	29,6	0,75	10,5	14	21,1	15	100	100
70-90	AT016129	29,6	0,75	10,5	14	21,1	13	50	50
80-100	AT016137	29,6	0,75	10,5	14	21,1	11	50	50
90-110	AT016145	29,6	0,75	10,5	14	21,1	11	25	25
100-120	AT016153	29,6	0,75	10,5	14	21,1	11	25	25
110-130	AT016161	29,6	0,75	10,5	14	21,1	11	25	25
120-140	AT016170	29,6	0,75	10,5	14	21,1	11	25	25
130-150	AT016188	29,6	0,75	10,5	14	21,1	11	25	25
140-160	AT016196	29,6	0,75	10,5	14	21,1	11	25	25