


MIKALOR

W4 ASFA L (9 mm) Hose Clamp with W4 inner-ring (black finish)





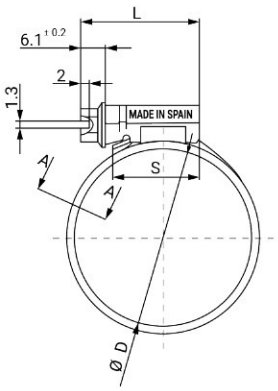

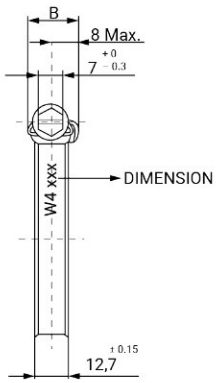

ASFA L hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose. The black finish is ideal for applications where the clamp is required to blend in with the rest of the assembly.

MATERIAL:	W4 Stainless steel X5Cr Ni 18/10 DIN 1.4301 AISI 304 Inner-ring: Stainless stee DIN 1.4310 AISI 301
FINISH:	Clamp: Black Delta Seal Inner-ring: Black tefloned
CORROSION RESISTANCE:	400 hours salt spray (ASTM B-117)

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	AT014035	23,6	0,75	10,5	14	16,5	42	200	200
20-32	AT014043	23,6	0,75	10,5	14	16,5	36	200	200
25-40	AT014051	25,6	0,75	10,5	14	17,1	32	100	100
30-45	AT014060	25,6	0,75	10,5	14	17,1	28	100	100
32-50	AT014078	25,6	0,75	10,5	14	17,1	24	100	100
40-60	AT014086	25,6	0,75	10,5	14	17,1	19	100	100
50-70	AT014094	29,6	0,75	10,5	14	21,1	17	100	100
60-80	AT014107	29,6	0,75	10,5	14	21,1	15	100	100
70-90	AT014115	29,6	0,75	10,5	14	21,1	13	50	50
80-100	AT014123	29,6	0,75	10,5	14	21,1	11	50	50
90-110	AT014140	29,6	0,75	10,5	14	21,1	11	25	25
100-120	AT014158	29,6	0,75	10,5	14	21,1	11	25	25
110-130	AT014166	29,6	0,75	10,5	14	21,1	11	25	25
120-140	AT014174	29,6	0,75	10,5	14	21,1	11	25	25
130-150	AT014182	29,6	0,75	10,5	14	21,1	11	25	25
140-160	AT014190	29,6	0,75	10,5	14	21,1	11	25	25