


MIKALOR

W5 ASFA L (9 mm) Hose Clamp with W4 inner-ring (plain finish)





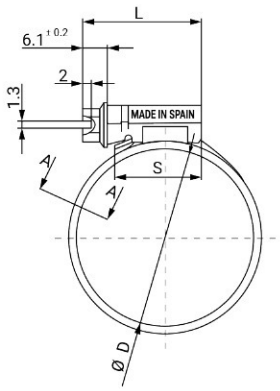

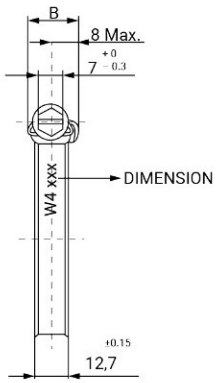

ASFA L hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose, especially where vibration over long periods of time is an issue.

These clamps are particularly recommended for use on silicone hoses, which can be easily cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose, as well as distributing the pressure of the clamp evenly around the hose.

MATERIAL: W5 Stainless steel
X5Cr Ni Mo 17.12.2
DIN 1.4401 ASI 316
Inner-ring: Stainless steel
AISI 301 DIN 1.4310

CORROSION RESISTANCE: 1000 hours salt spray (ASTM B-117)

Ø D Application +2	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	A3015775	23,6	0,75	10,5	14	16,5	42	200	200
20-32	A3015783	23,6	0,75	10,5	14	16,5	36	200	200
25-40	A3015804	25,6	0,75	10,5	14	17,1	32	100	100
30-45	A3015812	25,6	0,75	10,5	14	17,1	28	100	100
32-50	A3015820	25,6	0,75	10,5	14	17,1	24	100	100
40-60	A3015839	25,6	0,75	10,5	14	17,1	19	100	100
50-70	A3015847	29,6	0,75	10,5	14	21,1	17	100	100
60-80	A3015855	29,6	0,75	10,5	14	21,1	15	100	100
70-90	A3015863	29,6	0,75	10,5	14	21,1	13	50	50
80-100	A3015871	29,6	0,75	10,5	14	21,1	11	50	50
90-110	A3015880	29,6	0,75	10,5	14	21,1	11	25	25
100-120	A3015898	29,6	0,75	10,5	14	21,1	11	25	25
110-130	A3015900	29,6	0,75	10,5	14	21,1	11	25	25
120-140	A3015919	29,6	0,75	10,5	14	21,1	11	25	25
130-150	A3015927	29,6	0,75	10,5	14	21,1	11	25	25
140-160	A3015935	29,6	0,75	10,5	14	21,1	11	25	25

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy