MIKALOR



W1

DIN 3021 Spring Band Clamp W1

This heavy-duty spring-band clamp is manufactured according to DIN 3021.


It is especially recommended for applications where temperature can vary from -40 ºC to +120 ºC.

The design of this clamp means that thanks to the elasticity of the material used in its manufacture, it maintains the same radial force despitechanges in temperature. It is fast and easy to mount and is also reusable.


Nominal Ø dn	Part Number	Bandwidth	Ø Closed	Ø Open	S ±0,4	Fixing Load Min.	a Max.	b Max.	h Max.	Box Quantity	Outer Box Quantity
13,0	03031766	12	12,0	14,2	0,8	100	9	10	40	200	1.600
14,0	03031834	12	13,3	15,8	0,8	100	9	10	40	200	1.950
15,0	03031777	12	13,9	16,5	0,8	130	9	10	40	200	1.600
16,0	03031802	12	14,9	17,5	0,8	160	9	10	40	200	1.600
17,0	03031501	12	15,6	18,5	0,8	160	9	10	40	200	1.600
18,0	03031812	12	16,0	19,0	0,8	200	9	10	40	200	1.600
19,0	03031510	12	17,8	20,2	1,3	300	9	10	40	200	800
20,0	03031528	12	18,4	21,6	1,3	200	9	10	40	200	1.600
21,0	03031536	12	19,4	22,5	1,3	200	9	10	40	200	800
22,0	03031538	12	20,5	24,2	1,3	200	9	10	40	200	800
23,0	03031545	12	21,0	24,7	1,3	230	9	10	40	200	800
24,0	03031552	12	22,0	26,0	1,3	230	9	10	40	200	800
25,0	03031560	12	23,5	26,8	1,3	260	9	10	40	200	800
26,0	03031579	12	24,3	28,0	1,7	270	9	10	60	200	800
27,0	03031587	12	25,2	29,2	1,7	280	9	10	60	200	800
28,0	03031593	12	26,1	30,2	1,7	300	9	10	60	100	400
29,0	03031595	12	27,0	31,5	1,7	300	9	10	60	100	800

MIKALOR

Nominal Ø dn	Part Number	Bandwidth	Ø Closed	Ø Open	S ±0,4	Fixing Load Min.	a Max.	b Max.	h Max.	Box Quantity	Outer Box Quantity
30,0	03031823	12	28,0	32,5	1,7	300	9	10	60	100	800
32,0	03031616	12	29,3	34,5	1,7	300	9	10	60	200	200
34,0	03031620	12	30,6	36,4	1,7	300	9	10	60	200	200
35,0	03031624	12	31,5	38,0	1,7	300	9	10	60	200	800
36,0	03031632	12	32,5	39,0	1,7	300	9	10	60	200	1.600
38,0	03031640	12	34,5	41,5	1,7	300	9	10	60	200	1.600
40,0	03031667	12	35,5	42,5	1,7	300	9	10	60	200	200
41,0	03031669	12	35,3	43,5	2,1	370	9	10	60	200	800
42,0	03031675	12	37,2	44,5	2,1	340	9	10	60	100	400
44,0	03031691	12	38,5	46,5	2,1	340	9	10	60	50	400
46,0	03031704	12	40,5	48,5	2,1	350	9	10	60	100	400
47,0	03031712	12	41,4	50,0	2,1	380	9	10	60	100	400
49,0	03031719	12	42,5	52,0	2,1	410	9	10	72	50	200
50,0	03031720	12	43,5	53,0	2,1	410	9	10	72	100	400
51,0	03031739	12	44,0	54,0	2,1	410	9	10	72	100	400
53,0	03031747	12	46,0	55,8	2,1	410	9	10	72	50	200
55,0	03031755	12	46,8	58,0	2,1	430	9	10	72	100	400



TECHNICAL INFORMATION	
MATERIAL	Steel W1 51 CrV4
FINISH	Black, CrVI-free
CORROSION RESISTANCE	720 hours salt spray (ASTM B-117)

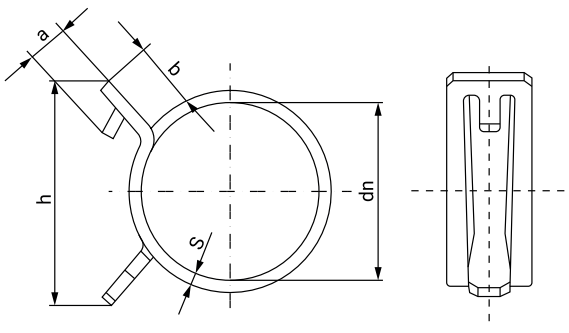

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy