MIKALOR



W2 W4

Endless Band and Housing

Adapflex perforated banding with separate housings is recommended for occasional use in applications with variable diameters.

The fact that this clamp comes in rolls of 3 m and 25 m means that you can clamp diameters which standard clamps cannot cover. There is no need to know the application diameter beforehand as you can adjust the clamp to the diameter required on each occasion. The assembly of this clamp is quick, clean and easy. All you require is a cutting tool and a conventional flat-head screwdriver.

Endless Band

Denomination	Part Number	Material	C ±0.2	T ±0.1	Box Quantity	Outer Box Quantity
CP825W2	03035111	W2	8	0,65	25 meters	14
CP1425W2	03035611	W2	14	0,70	25 meters	10
CP825W4	03035311	W4	8	0,65	25 meters	14
CP1425W4	03035811	W4	14	0,70	25 meters	10



Housing for Endless Band

Denomination	Part Number	Material	L ±1	Y ±0.1	H ±0.5	B ±0.2	G ±0.2	A ±0.5	Max. Values Torque (Nm)	Box Quantity	Outer Box Quantity
CCP8W2	03035121	W2	21,0	0,7	8,8	12	6	32,5	1,5	50	2.000
CCP14W2	03035321	W2	31,3	1,0	11,7	18	8	38,8	5,0	50	800
CCP8W4	03035321	W4	21,0	0,7	8,8	12	6	32,5	1,5	50	800
CCP14W4	03035821	W4	31,3	1,0	11,7	18	8	38,8	5,0	50	800


MIKALOR



Endless Band + Housing Blister kit

Denomination	Part Number	Material	Bandwidth mm	Max. Values Torque (Nm)	Box Quantity	Outer Box Quantity
CCP83W2	03035101	W2	8	1,5	3 m + 8 housings	50
CCP143W2	03035601	W2	14	5,0	3 m + 8 housings	50
CCP83W4	03035301	W4	8	1,5	3 m + 8 housings	50
CCP143W4	03035801	W4	14	5,0	3 m + 8 housings	50

	TECHNICAL INFORMATION	
	MATERIAL	**W2**: Stainless steel Band W2 AISI 430 Steel Screw Qst 36-3 Zinc Plated Cr3 **W4**: Stainless steel Band W4 AISI 304
	CORROSION RESISTANCE	**W2**: 72 hours salt spray (ASTM B-117) **W4**: 400 hours salt spray (ASTM B-117)

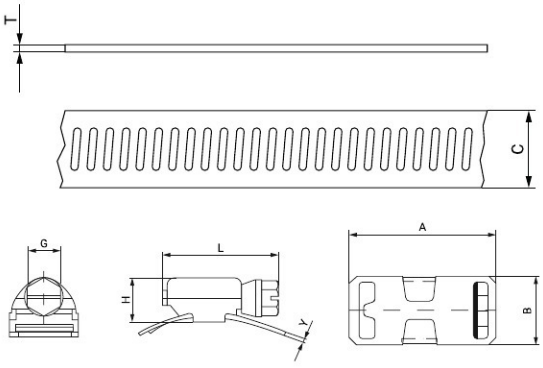

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy