MIKALOR



W1

Fixed Diameter Clamp W1

The fixed diameter "S" clamp was designed to ensure the best possible fit of hose and coupling.

The clamping range of this clamp is minimal, meaning that the diameter of the clamp before and after tightening is very similar. Once the clamp has been mounted and tightened it fits the desired diameter exactly. Another advantage is that very little tightening is required to reach the required torque.


The design of the "S" clamp means that it can be used to assemble hoses with metal or plastic couplings. It is particularly recommended for certain sectors ranging from medical machinery manufacture to cars and motorcycles.

*** This clamp can be supplied in diameters up to 120mm and in bandwidths up to 20mm.**


Denomination	Ø d Application mm	Part Number	a ±0.3	L Max.	d2	b2	S1 +0.2 -0.1	h	S2	Box Quantity	Outer Box Quantity
ADF10/9	10	03032010	9	31	M4	10,5	0,4	11,0	-	500	500
ADF11/9	11	03032029	9	31	M4	10,5	0,4	11,0	-	500	2.000
ADF12/9	12	03032037	9	31	M4	10,5	0,4	11,0	-	500	500
ADF13/9	13	03032045	9	31	M4	10,5	0,4	11,0	-	500	2.000
ADF14/9	14	03032053	9	31	M4	10,5	0,4	11,0	-	500	500
ADF15/9	15	03032061	9	31	M4	10,5	0,4	11,0	-	500	500
ADF16/9	16	03032070	9	31	M4	10,5	0,4	11,0	-	500	2.000
ADF17/9	17	03032088	9	31	M4	10,5	0,4	11,0	-	500	2.000
ADF18/9	18	03032096	9	31	M4	10,5	0,4	11,0	-	500	500
ADF19/9	19	03032109	9	31	M4	10,5	0,4	11,0	-	250	1.000
ADF20/9	20	03032117	9	31	M4	10,5	0,4	11,0	-	500	500
ADF15/12	15	03032681	12	35	M5	14,0	0,5	13,5	8	250	1.000
ADF17/12	17	03032702	12	35	M5	14,0	0,5	13,5	8	250	250
ADF18/12	18	03032714	12	35	M5	14,0	0,5	13,5	8	250	250
ADF19/12	19	03032723	12	35	M5	14,0	0,5	13,5	8	200	800
ADF21/12	21	03032740	12	35	M5	14,0	0,5	13,5	8	250	1.000
ADF22/12	22	03032758	12	35	M5	14,0	0,5	13,5	8	200	800
ADF23/12	23	03032766	12	35	M5	14,0	0,5	13,5	8	250	250
ADF24/12	24	03032774	12	35	M5	14,0	0,5	13,5	8	200	800
ADF25/12	25	03032782	12	35	M5	14,0	0,5	13,5	8	200	800
ADF26/12	26	03032790	12	35	M5	14,0	0,5	13,5	8	200	800
ADF27/12	27	03032803	12	35	M5	14,0	0,5	13,5	8	200	200
ADF28/12	28	03032811	12	35	M5	14,0	0,5	13,5	8	250	250
ADF29/12	29	03032820	12	35	M5	14,0	0,5	13,5	8	100	400
ADF30/12	30	03032838	12	35	M5	14,0	0,5	13,5	8	100	400

MIKALOR

Denomination	Ø d Application mm	Part Number	a ±0.3	L Max.	d2	b2	S1 +0.2 -0.1	h	S2	Box Quantity	Outer Box Quantity
ADF21/15	21	03033347	15	40	M6	17,0	0,6	17,0	10	250	250
ADF23/15	23	03033363	15	40	M6	17,0	0,6	17,0	10	250	250
ADF25/15	25	03033380	15	40	M6	17,0	0,6	17,0	10	250	250
ADF26/15	26	03033398	15	40	M6	17,0	0,6	17,0	10	250	250
ADF31/15	31	03033443	15	40	M6	17,0	0,6	17,0	10	100	400
ADF32/15	32	03033451	15	40	M6	17,0	0,6	17,0	10	100	400
ADF33/15	33	03033460	15	40	M6	17,0	0,6	17,0	10	100	400
ADF34/15	34	03033478	15	40	M6	17,0	0,6	17,0	10	100	400
ADF35/15	35	03033486	15	40	M6	17,0	0,6	17,0	10	100	400
ADF36/15	36	03033494	15	40	M6	17,0	0,6	17,0	10	100	100
ADF44/15	44	03033574	15	40	M6	17,0	0,6	17,0	10	100	100
ADF46/15	46	03033590	15	40	M6	17,0	0,6	17,0	10	100	100



TECHNICAL INFORMATION	
MATERIAL	Mild Steel W1 DIN 1.0935 Screw grade 6.6
FINISH	Zinc plated Cr3
CORROSION RESISTANCE	72 hours salt spray (ASTM B-117)

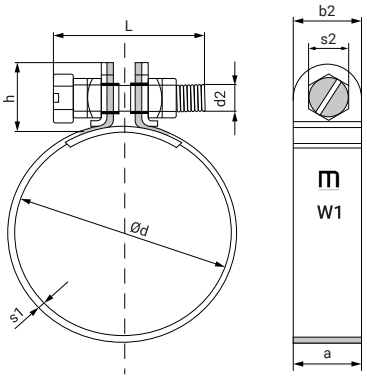

Available Through BORSERINI SRL
Via C. Negri 10-12 - 23030 Chiuro (SO) - Italy | +39 0342 209200 | info@borserini.it | www.borserini.com
Registered Office: Via Parolo 38 - 23100 Sondrio (SO) - Italy